


CPM-2



Unit:mm

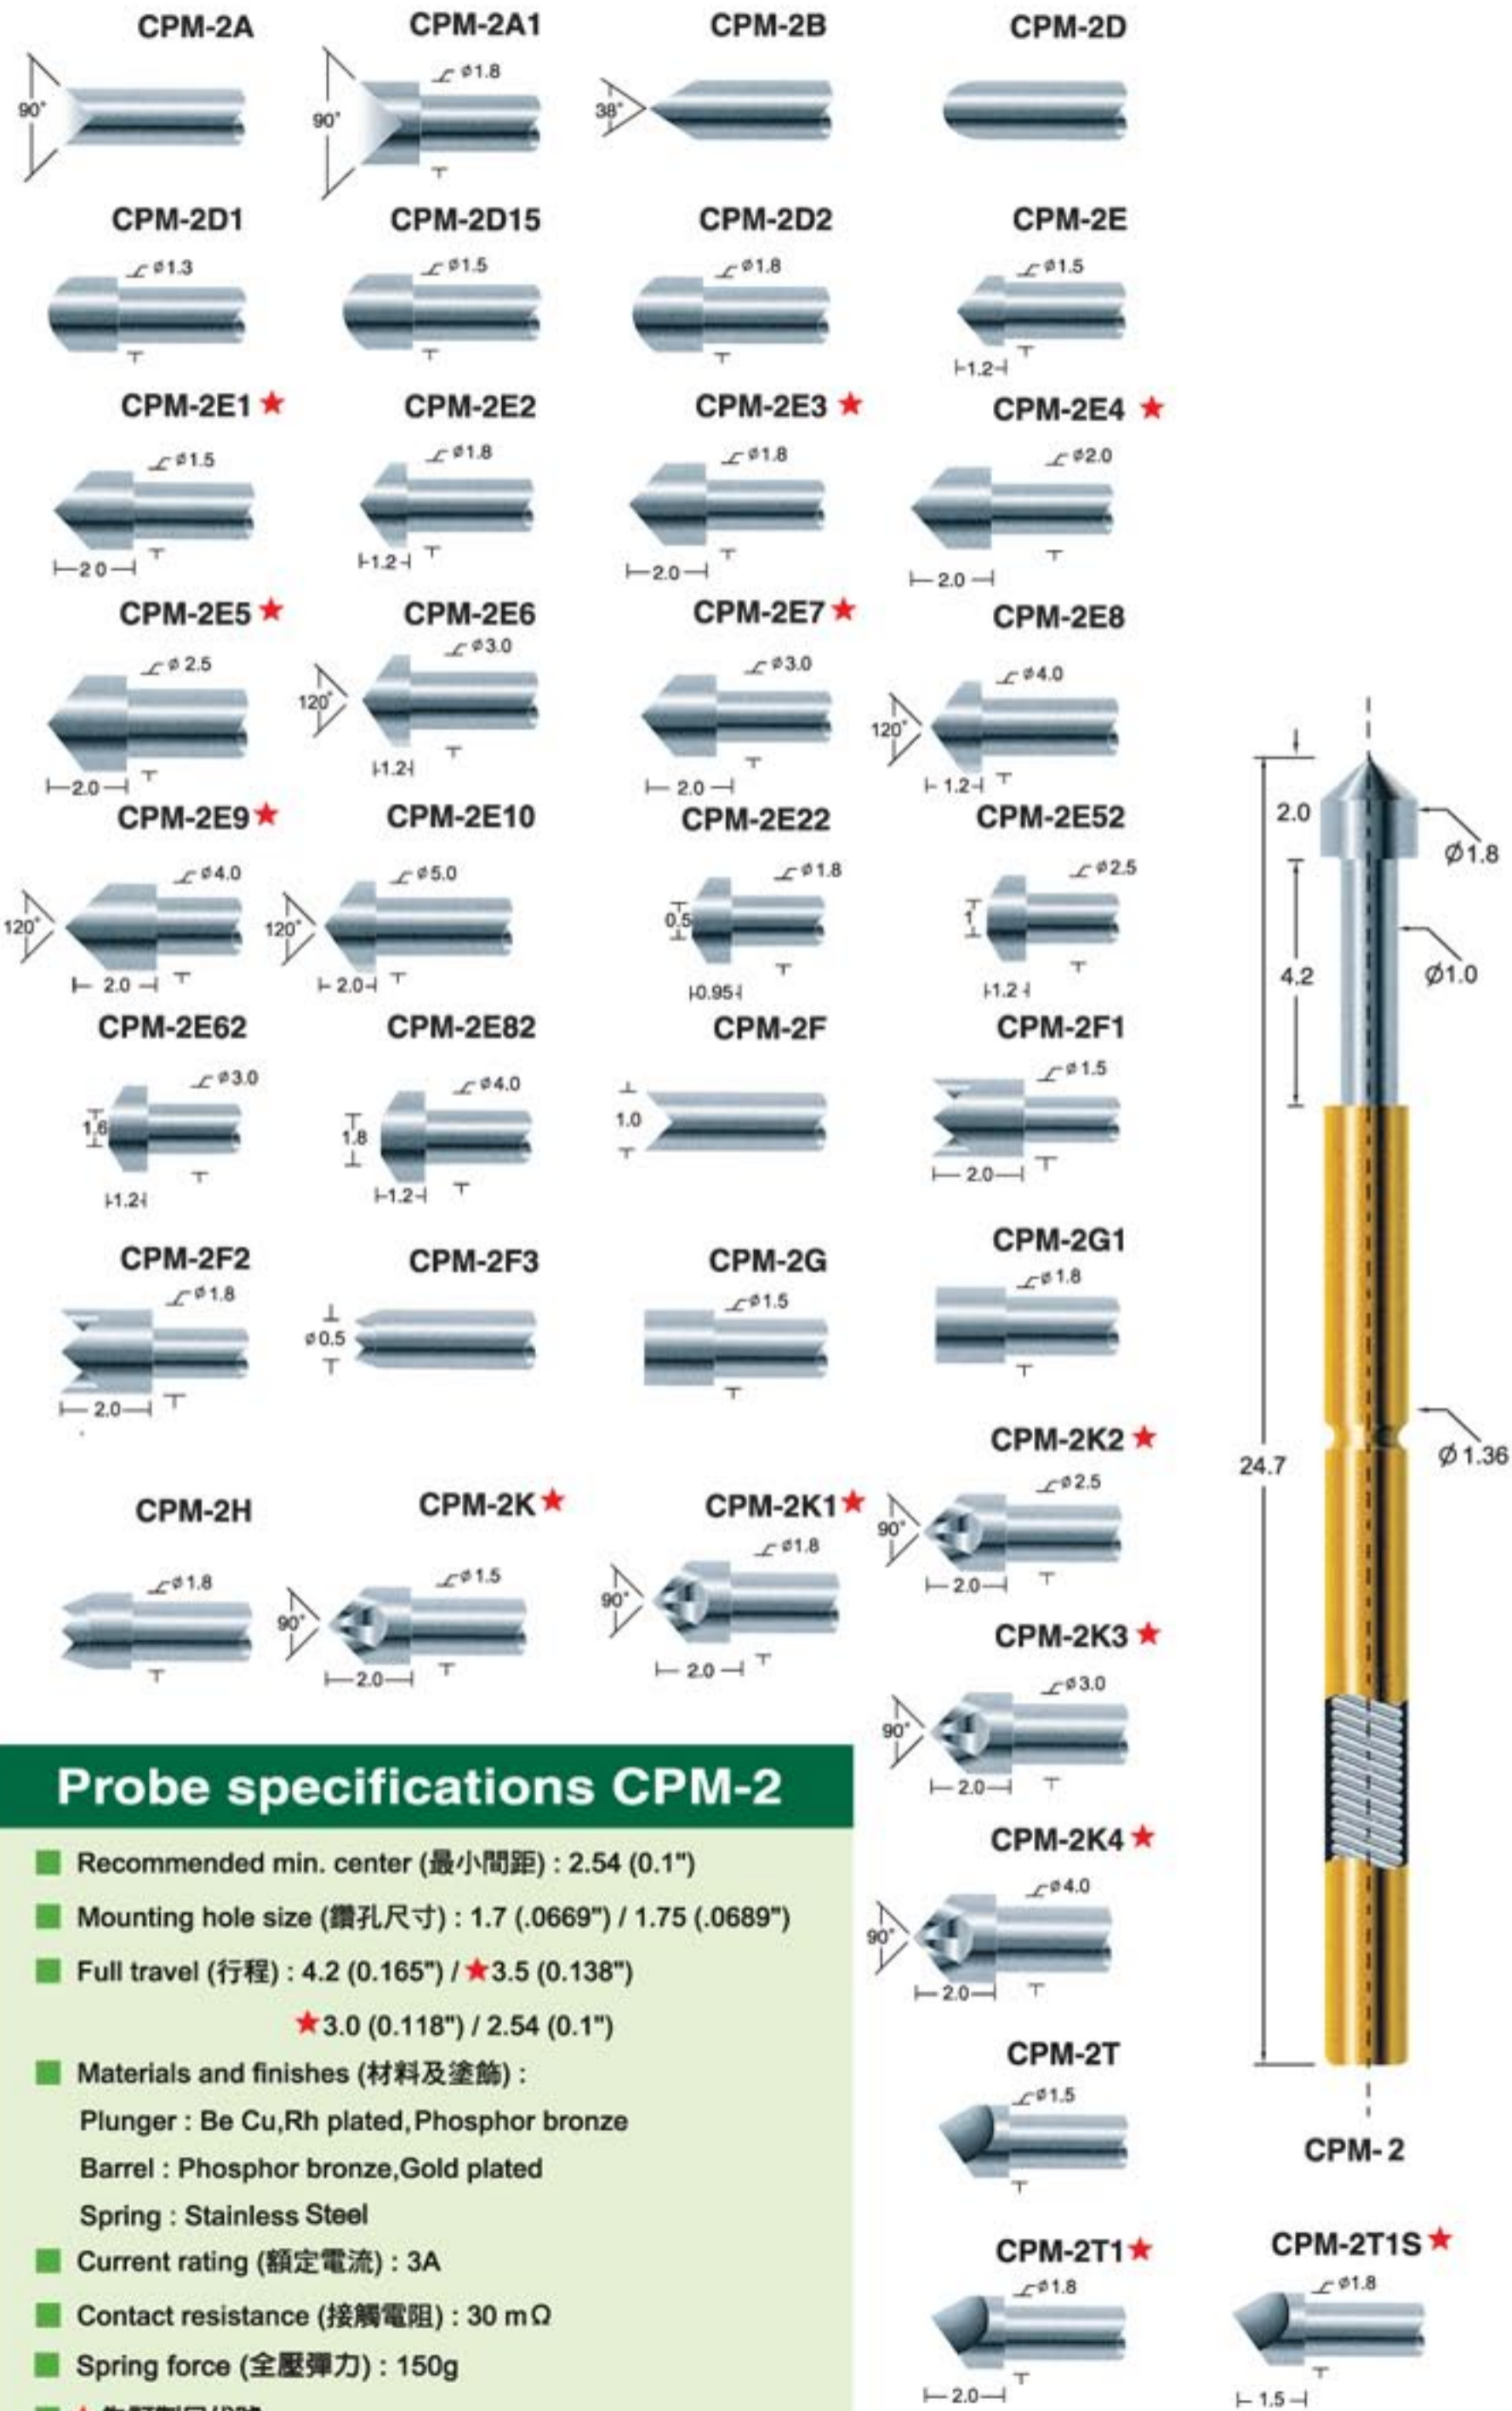

Probe specifications CPM-2

- Recommended min. center (最小間距) : 2.54 (0.1")
- Mounting hole size (鑽孔尺寸) : 1.7 (.0669") / 1.75 (.0689")
- Full travel (行程) : 4.2 (0.165") / ★3.5 (0.138")
★3.0 (0.118") / 2.54 (0.1")
- Materials and finishes (材料及塗飾) :
Plunger : Be Cu, Rh plated, Phosphor bronze
Barrel : Phosphor bronze, Gold plated
Spring : Stainless Steel
- Current rating (額定電流) : 3A
- Contact resistance (接觸電阻) : 30 mΩ
- Spring force (全壓彈力) : 150g
- ★ 為訂製品代號