


■ CPM-80 Series probe & receptacle .....	5
■ CPM-70 Series probe & receptacle .....	6
■ CPM-60 Series probe & receptacle .....	7
■ CPM-50 Series probe & receptacle .....	8
■ CPM-40 .40LL Series probe & receptacle .....	9
■ CPM-30 Series probe & receptacle .....	10
■ CPM-30L .30LL Series probe & receptacle .....	11
■ CPM-201 Series probe & receptacle .....	12
■ CPM-20 Series probe & receptacle .....	13
■ CPM-0 Series probe .....	14
■ R-0 Series receptacle .....	15
■ CPM-02 Series probe & receptacle .....	16
■ CPM-1 Series probe .....	17
■ R-1 Series receptacle .....	18
■ CPM-2 Series probe .....	19
■ R-2 Series receptacle .....	20
■ CPM-11 Series probe .....	21
■ R-11 Series probe .....	22
■ CPM-4.5.6.9.10 Series probe .....	23
■ CPM-111 R-111 Series probe & receptacle .....	24
■ CPM-25 R-8 Series probe & receptacle .....	25
■ R-25 Series receptacle .....	26
■ R-25 Series receptacle .....	27
■ CPM-050 Series probe & receptacle .....	28
■ CPM-050L Series probe & receptacle .....	29
■ CPM-75 Series probe .....	30
■ CPM-100 Series probe & receptacle .....	31
■ CPM-101,102,15 Series receptacle .....	32
■ B/B L/B Series guide pin .....	33



# CPM-80

Unit:mm

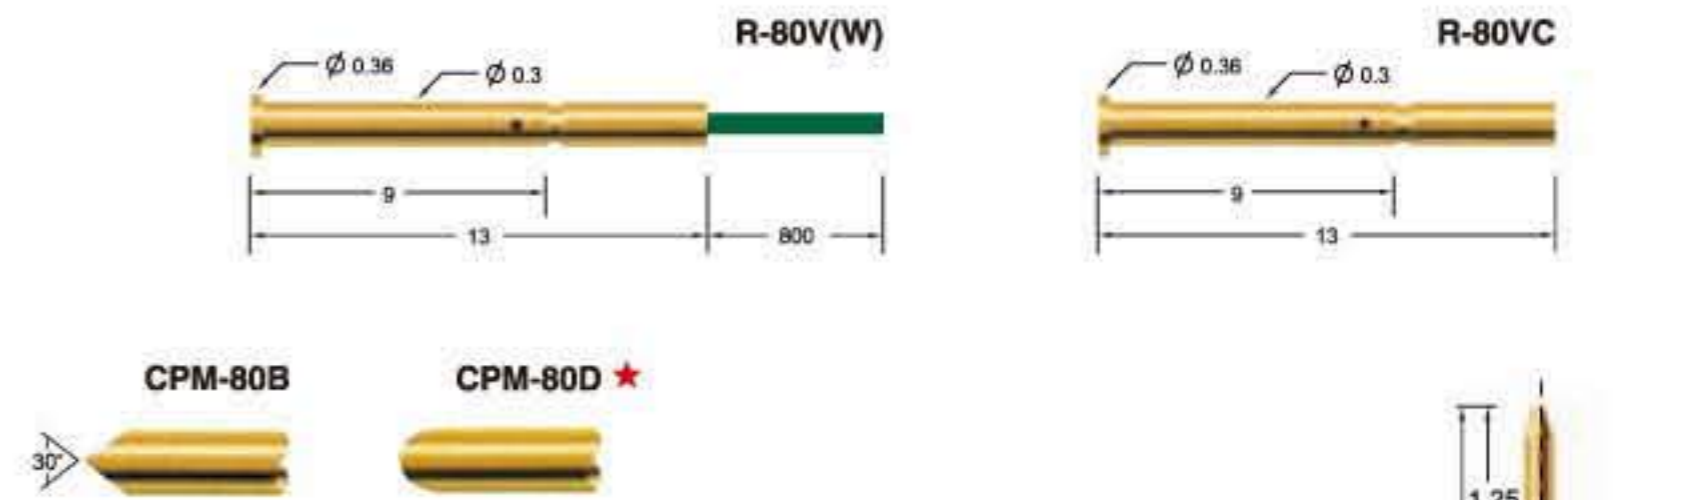


## Probe specifications CPM-80

- Recommended min. center (最小間距) : 0.5 (.0197")
- Mounting hole size (鑽孔尺寸) : 0.32 (.0126")
- Full travel (行程) : 1.25 (0.049"), 1.0 (0.039")
- Materials and finishes (材料及塗飾) :  
 Plunger : SK4,Au plated  
 Barrel : Phosphor bronze,Gold plated  
 Spring : Music wire,Gold plated
- Current rating (額定電流) :0.3A
- Contact resistance (接觸電阻) : 260mΩ
- Spring force (全壓彈力) : 15g

## Receptacle specifications

- Materials and finishes : Brass,Gold plated
- ★ 為訂製品代號


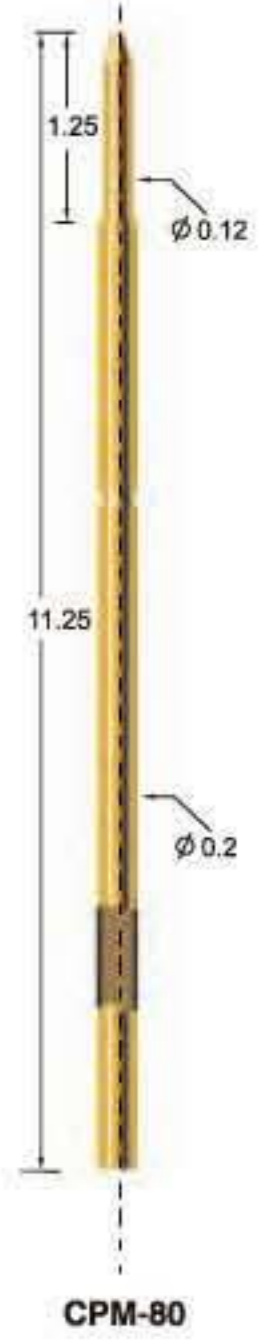


Chunglai probes manufacturing reserves the right to change products or specifications without notice.



# CPM-70

Unit:mm

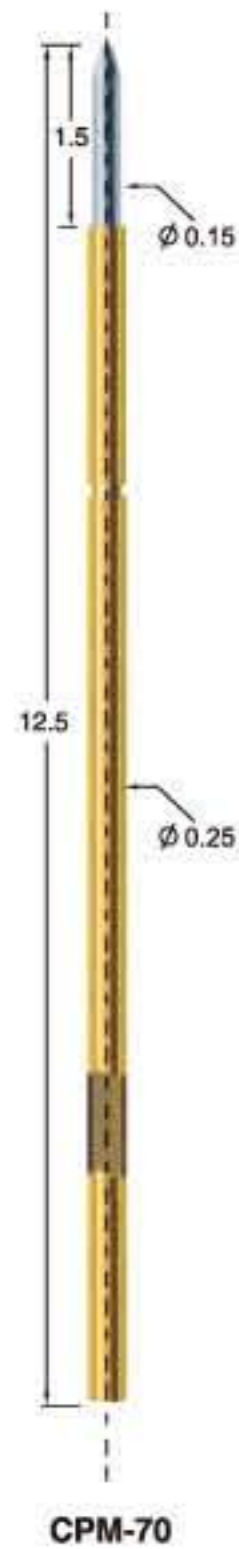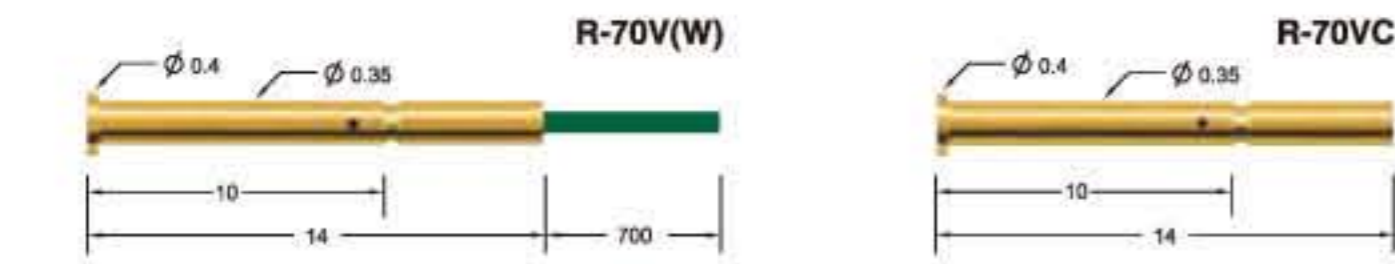

## Probe specifications CPM-70




- Recommended min. center (最小間距) : 0.55 (.0217")
- Mounting hole size (鑽孔尺寸) : 0.37 (.0157")
- Full travel (行程) : 1.5 (.059")
- Materials and finishes (材料及塗飾) :  
Plunger : SK4,Rh plated  
Barrel : Phosphor bronze,Gold plated  
Spring : Music wire,Gold plated
- Current rating (額定電流) : 0.3A
- Contact resistance (接觸電阻) : 220 mΩ
- Spring force (全壓彈力) : 20g

## Receptacle specifications

- Materials and finishes : Brass,Gold plated
- ★ 為訂製品代號

# CPM-60

Unit:mm

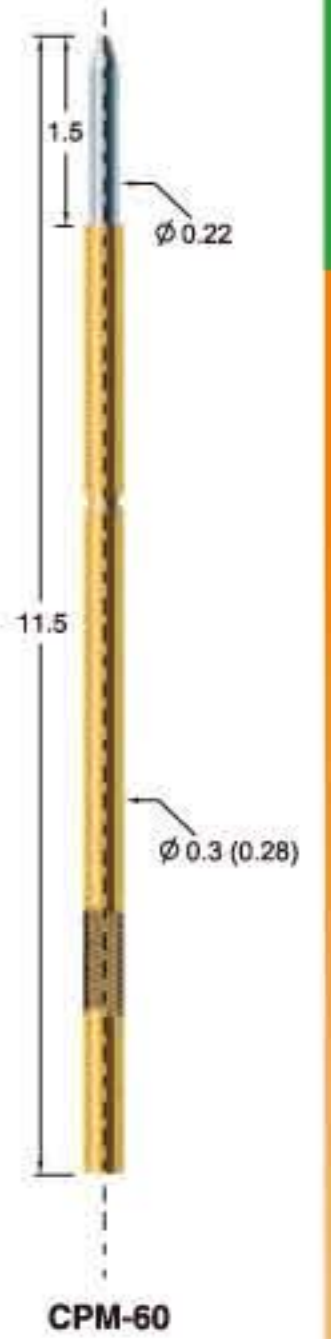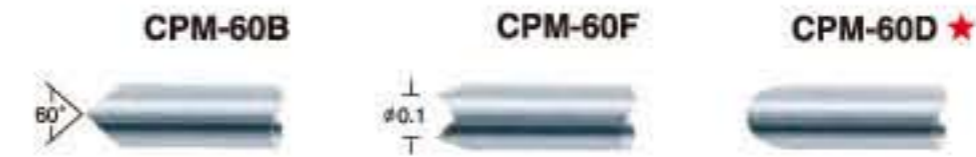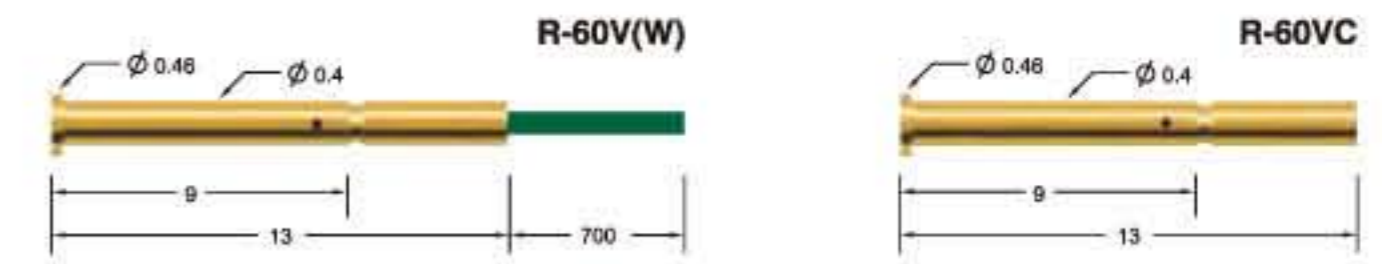

## Probe specifications CPM-60

- Recommended min. center (最小間距) : 0.6 (.0236")
- Mounting hole size (鑽孔尺寸) : 0.42 (.0165")
- Full travel (行程) : 1.5 (.059")
- Materials and finishes (材料及塗飾) :  
Plunger : SK4,Rh plated  
Barrel : Phosphor bronze,Gold plated  
Spring : Music wire,Gold plated
- Current rating (額定電流) : 0.5A
- Contact resistance (接觸電阻) : 200 mΩ
- Spring force (全壓彈力) : 30g


## Receptacle specifications

- Materials and finishes : Brass,Gold plated
- ★ 為訂製品代號



# CPM-50

Unit:mm

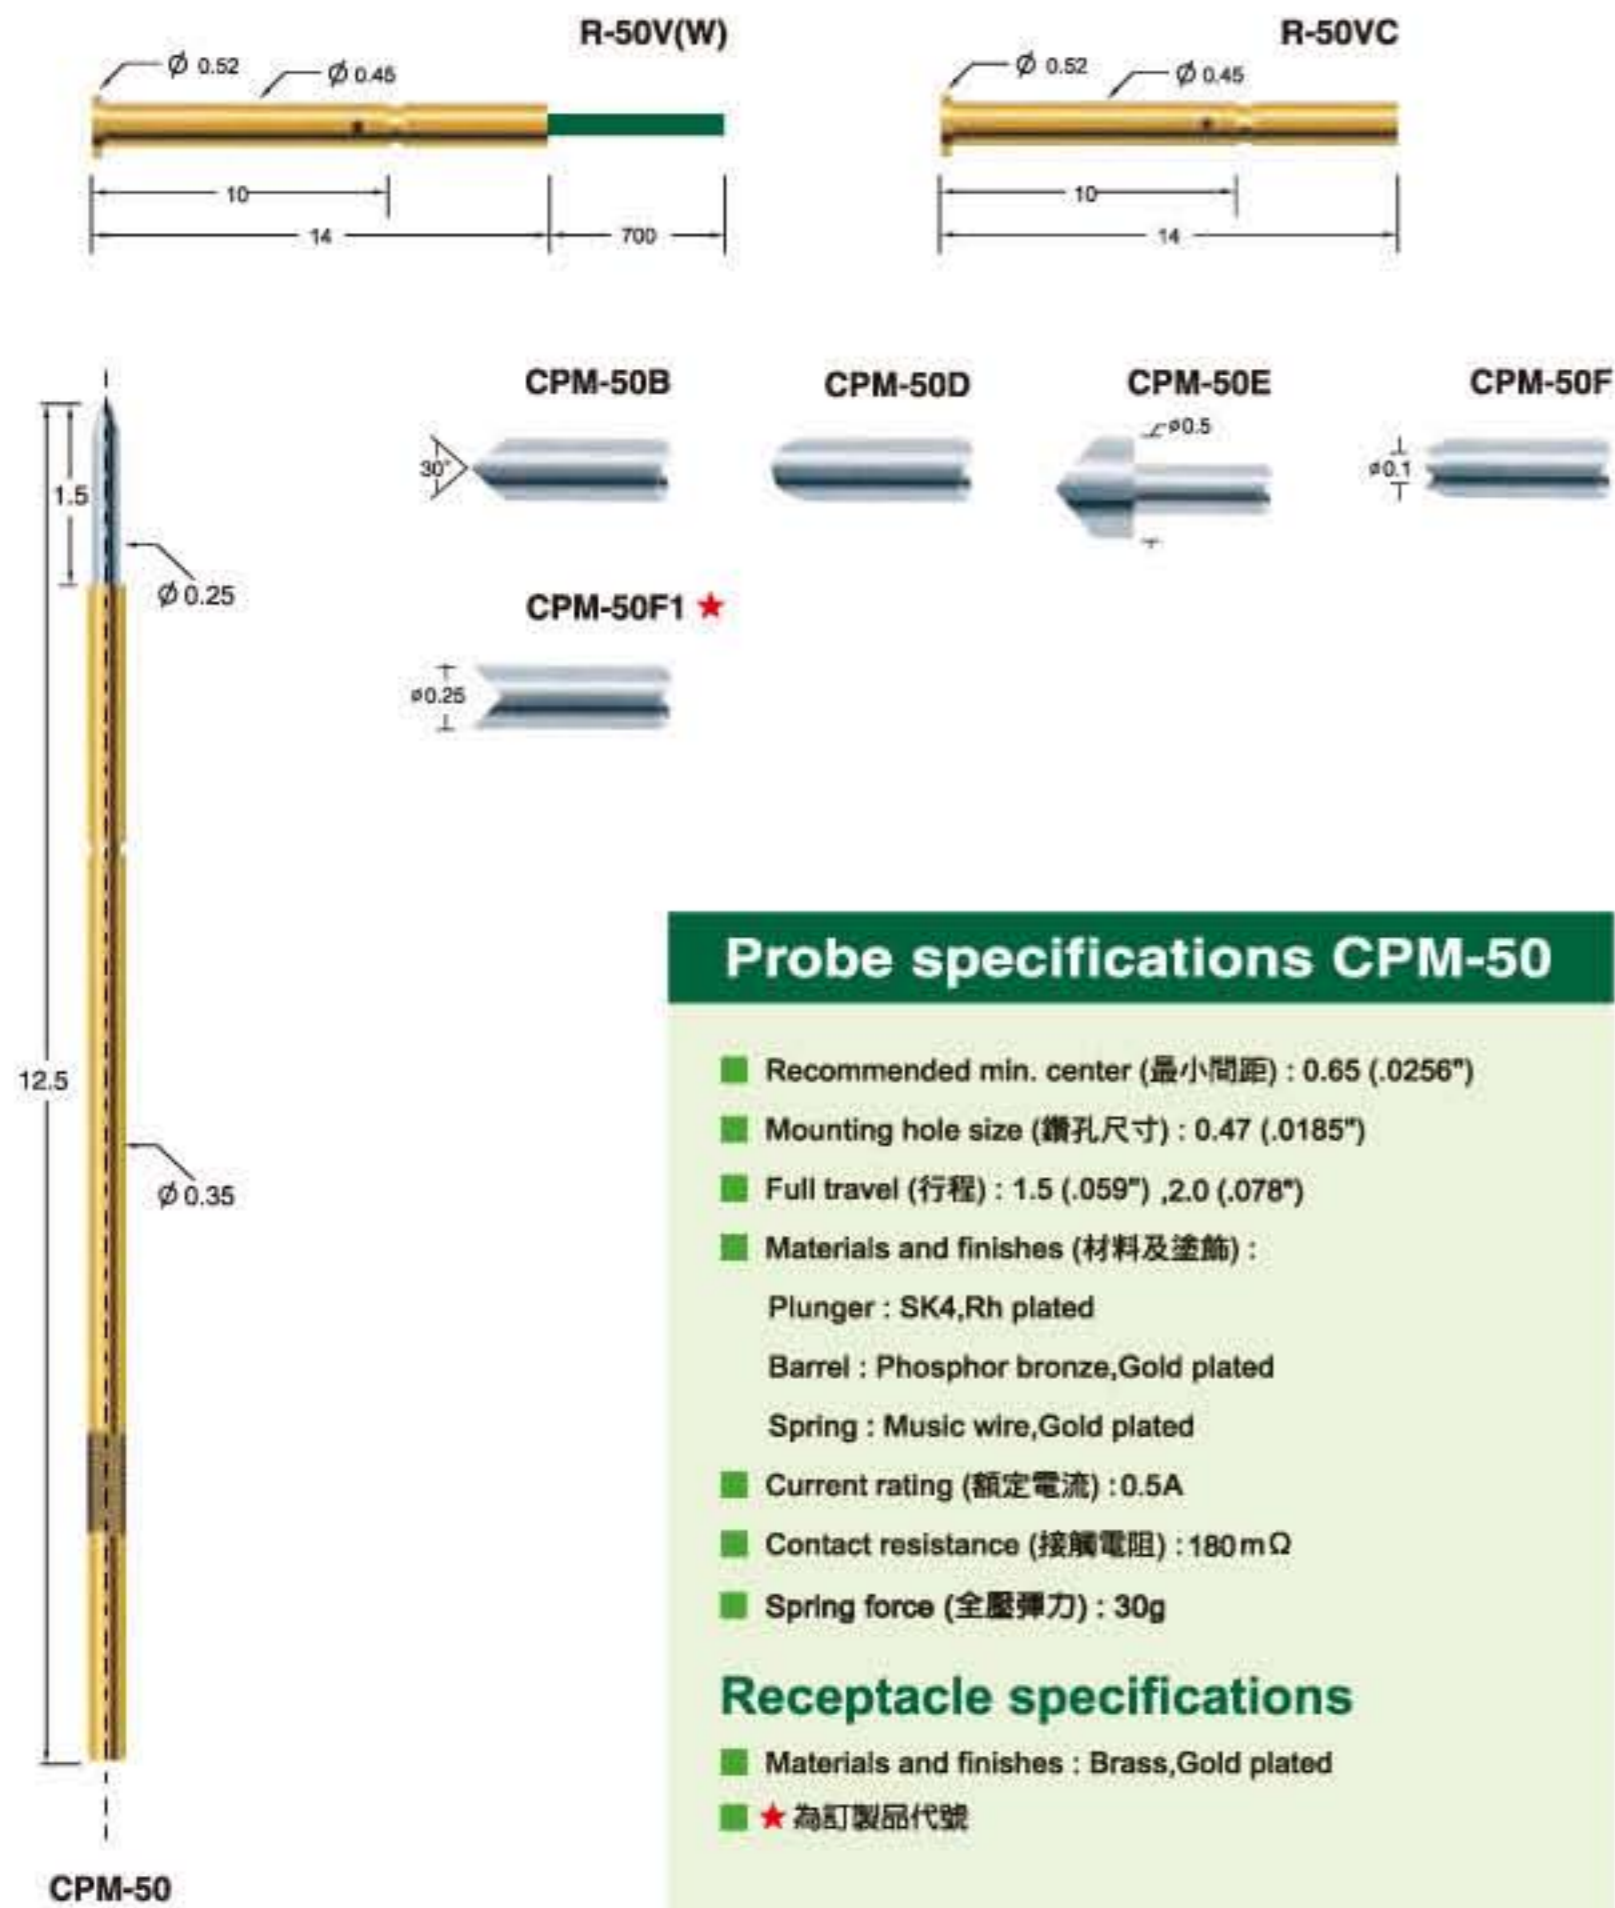

# CPM-40

Unit:mm

