
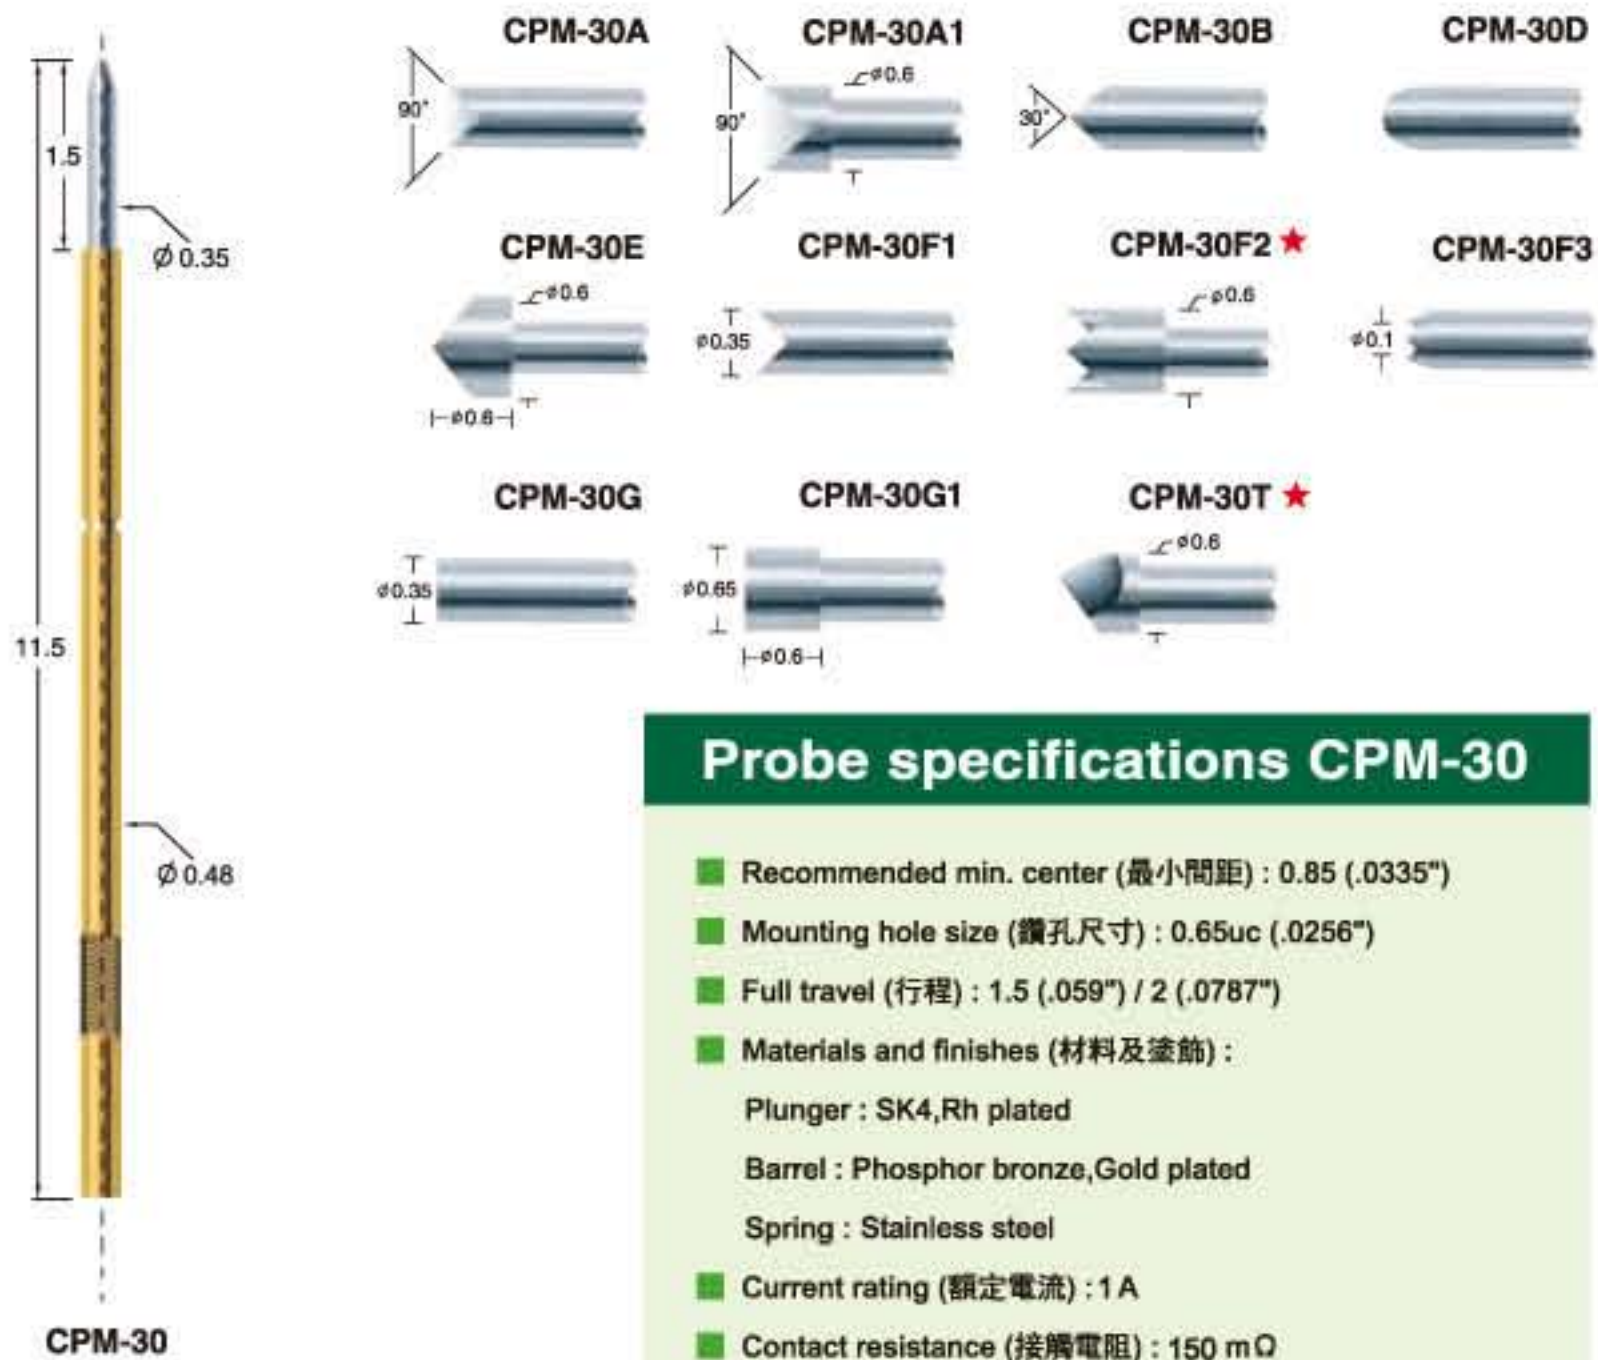


# CPM-30

Unit:mm

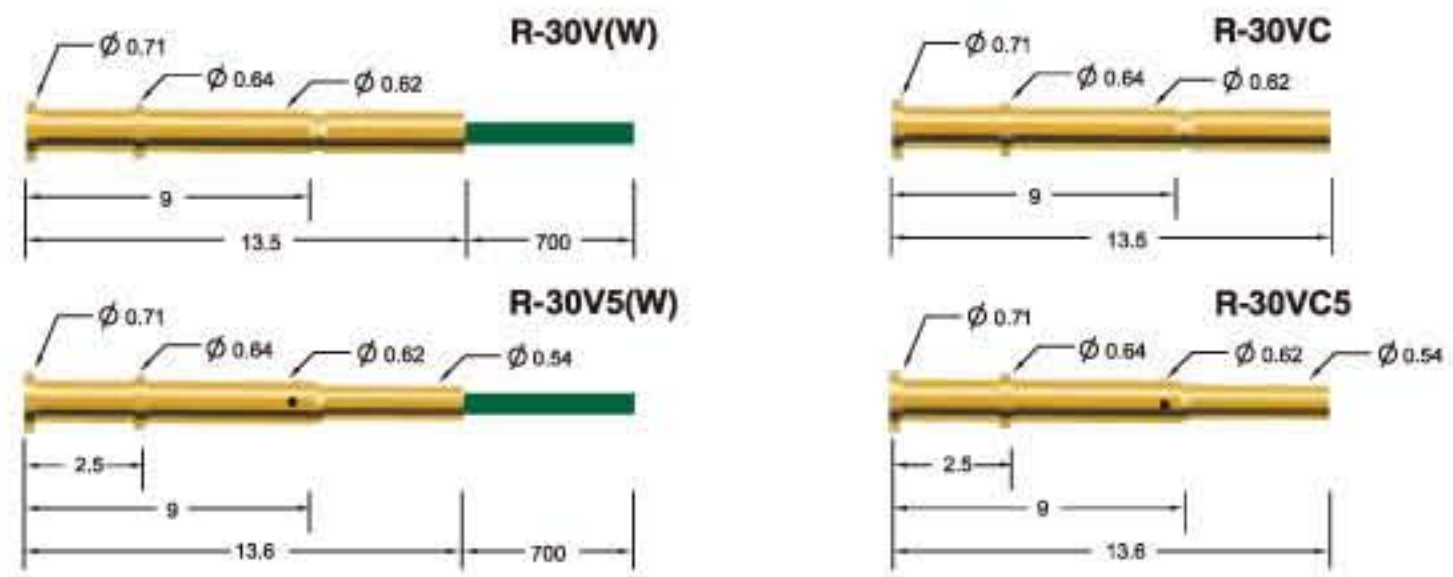

## Probe specifications CPM-30



- Recommended min. center (最小間距) : 0.85 (.0335")
- Mounting hole size (鑽孔尺寸) : 0.65uc (.0256")
- Full travel (行程) : 1.5 (.059") / 2 (.0787")
- Materials and finishes (材料及塗飾) :  
Plunger : SK4,Rh plated  
Barrel : Phosphor bronze,Gold plated  
Spring : Stainless steel
- Current rating (額定電流) : 1 A
- Contact resistance (接觸電阻) : 150 mΩ
- Spring force (全壓彈力) : 70g

## Receptacle specifications

- Materials and finishes : Brass,Gold plated
- ★ 為訂製品代號

# CPM-30L. 30LL

Unit:mm

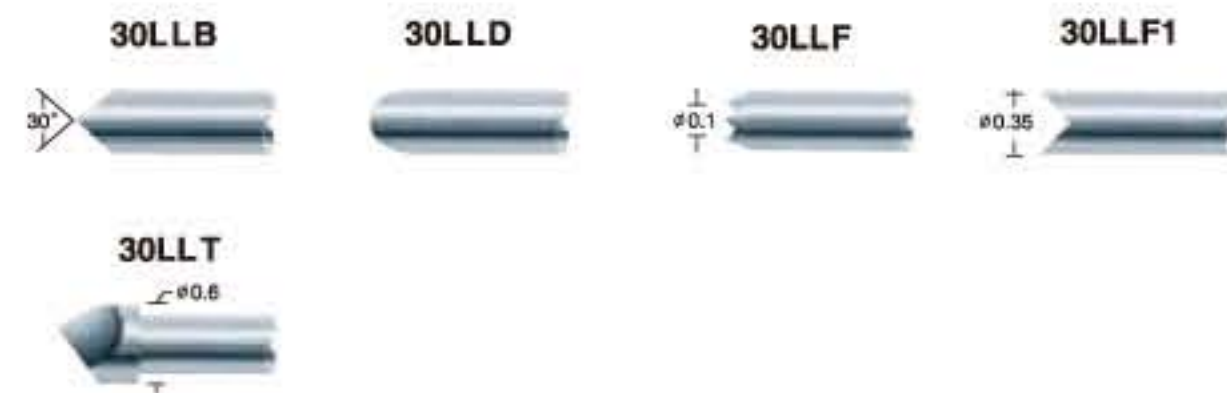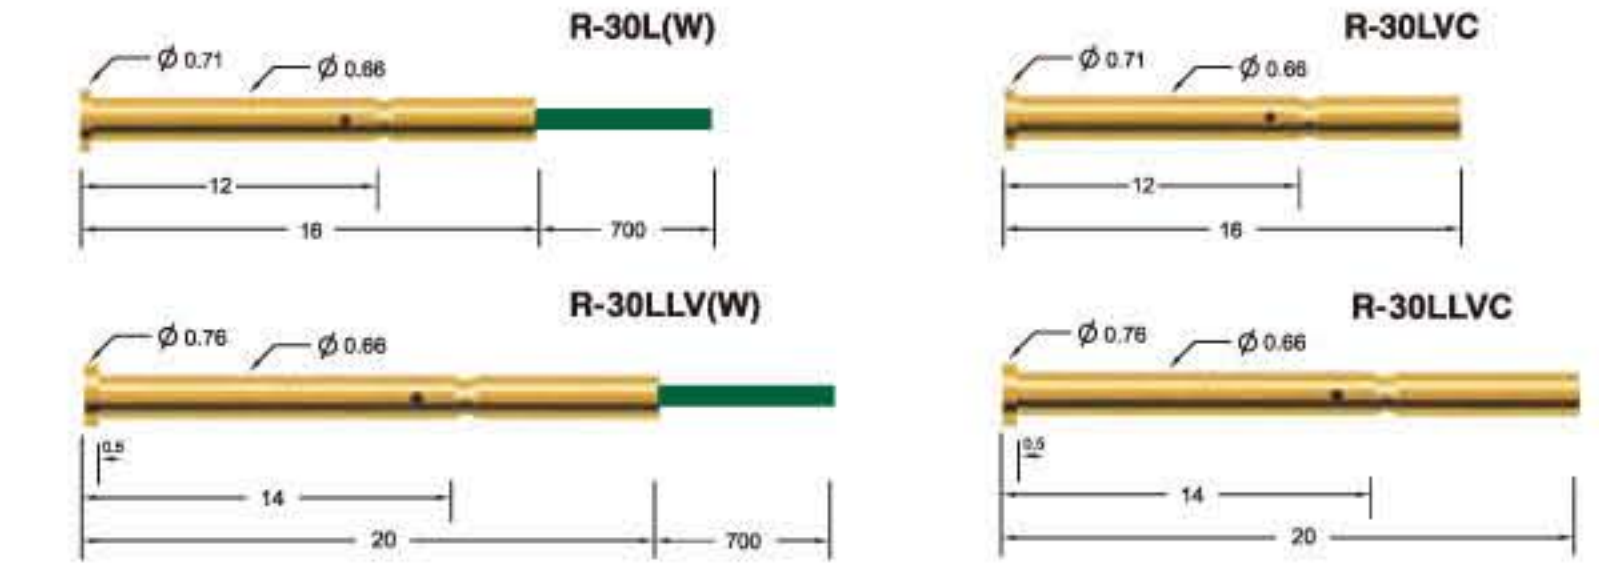


## Probe specifications CPM-30L

- Recommended min. center (最小間距) : 0.85 (.0335")
- Mounting hole size (鑽孔尺寸) : 0.65uc (.0256")
- Full travel (行程) : 2 (.0787") , 4 (.156")
- Materials and finishes (材料及塗飾) :  
Plunger : SK4,Rh plated  
Barrel : Phosphor bronze,Gold plated  
Spring : Stainless steel
- Current rating (額定電流) : 1 A
- Contact resistance (接觸電阻) : 150 mΩ
- Spring force (全壓彈力) : 70g

## Receptacle specifications

- Materials and finishes : Brass,Gold plated

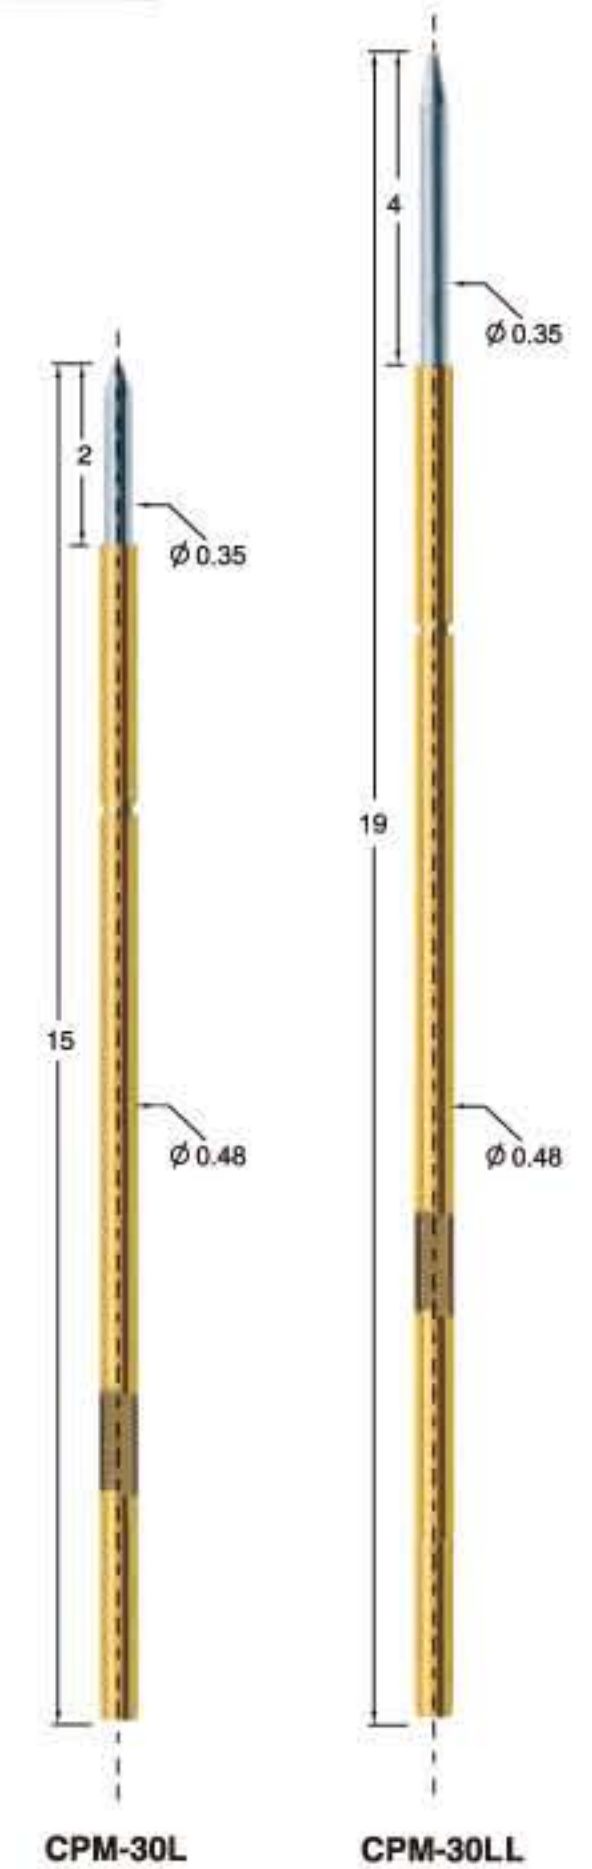



CPM-30L

CPM-30LL



# CPM-201

Unit:mm

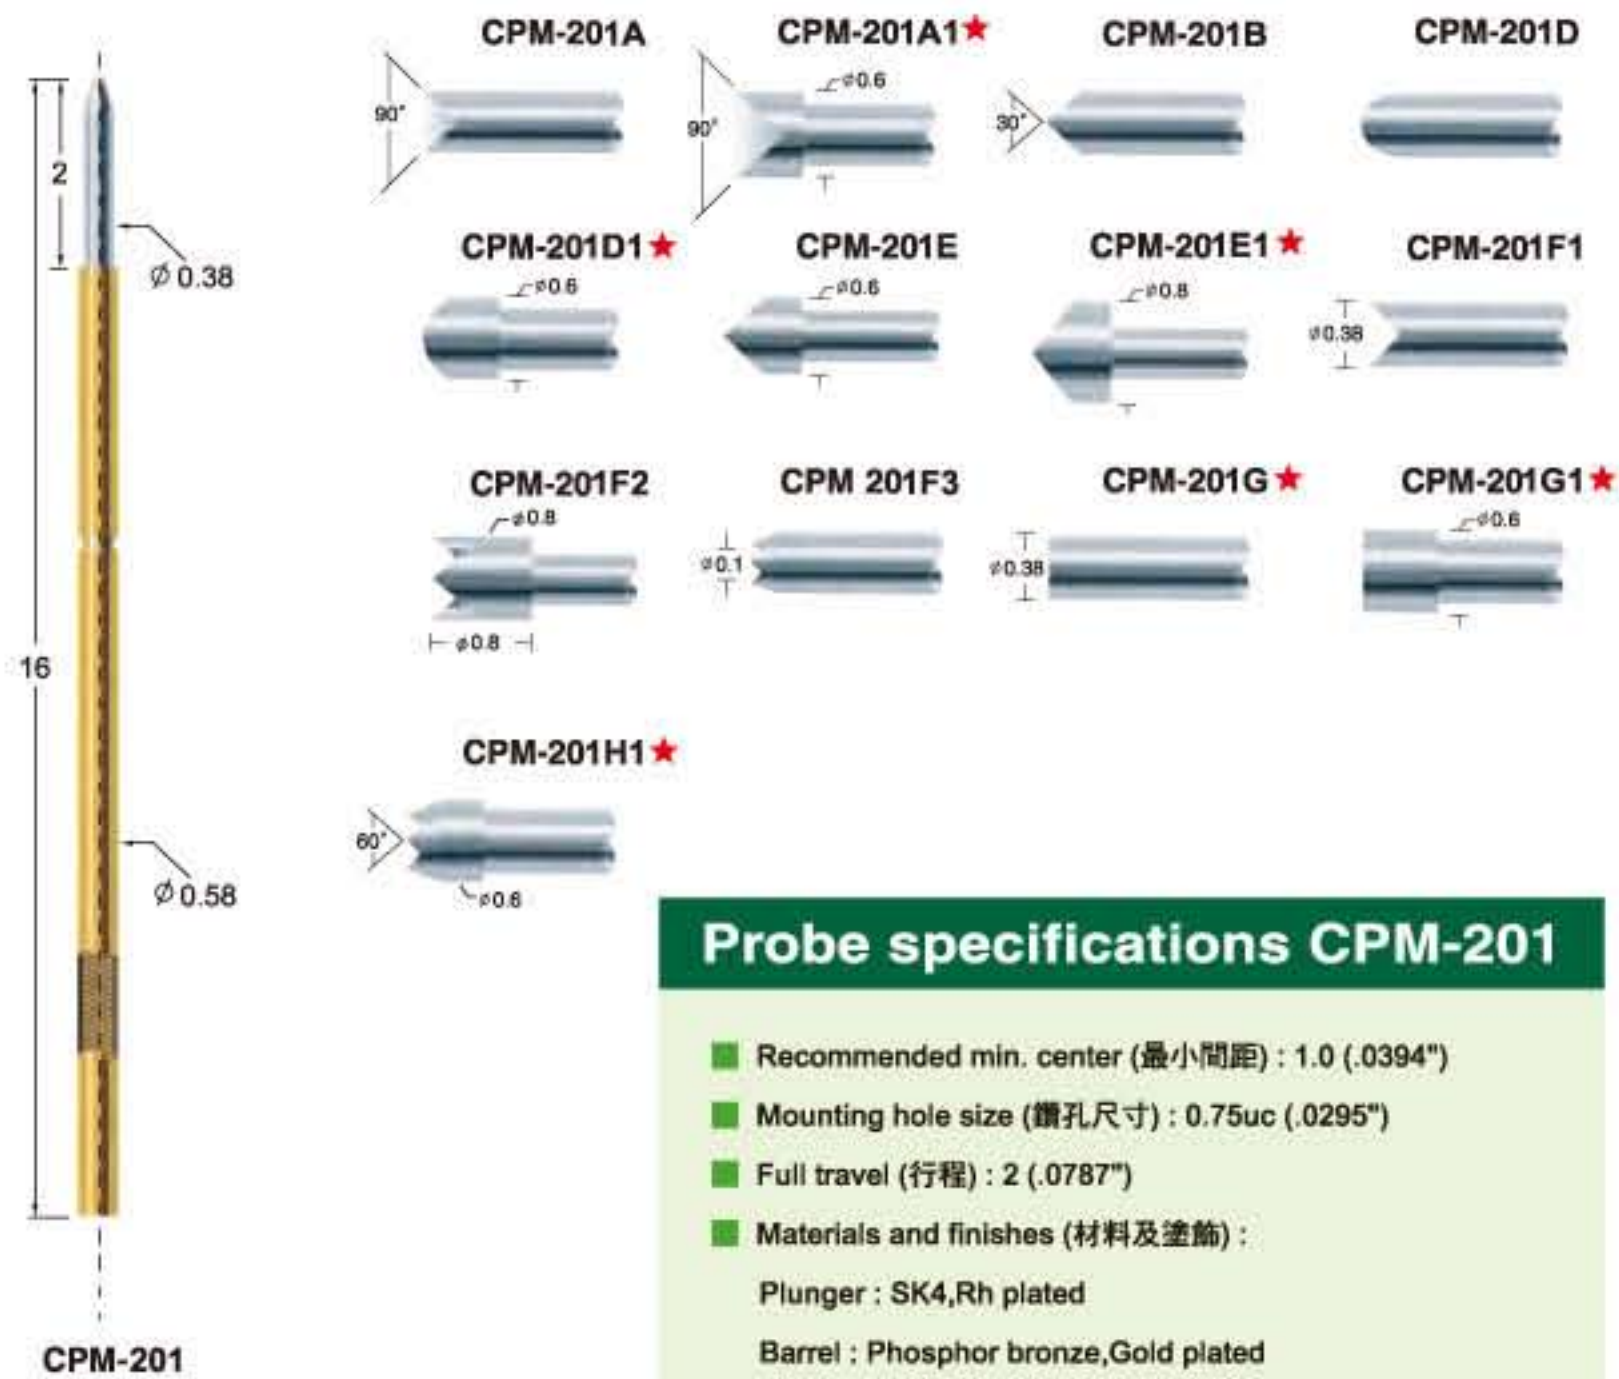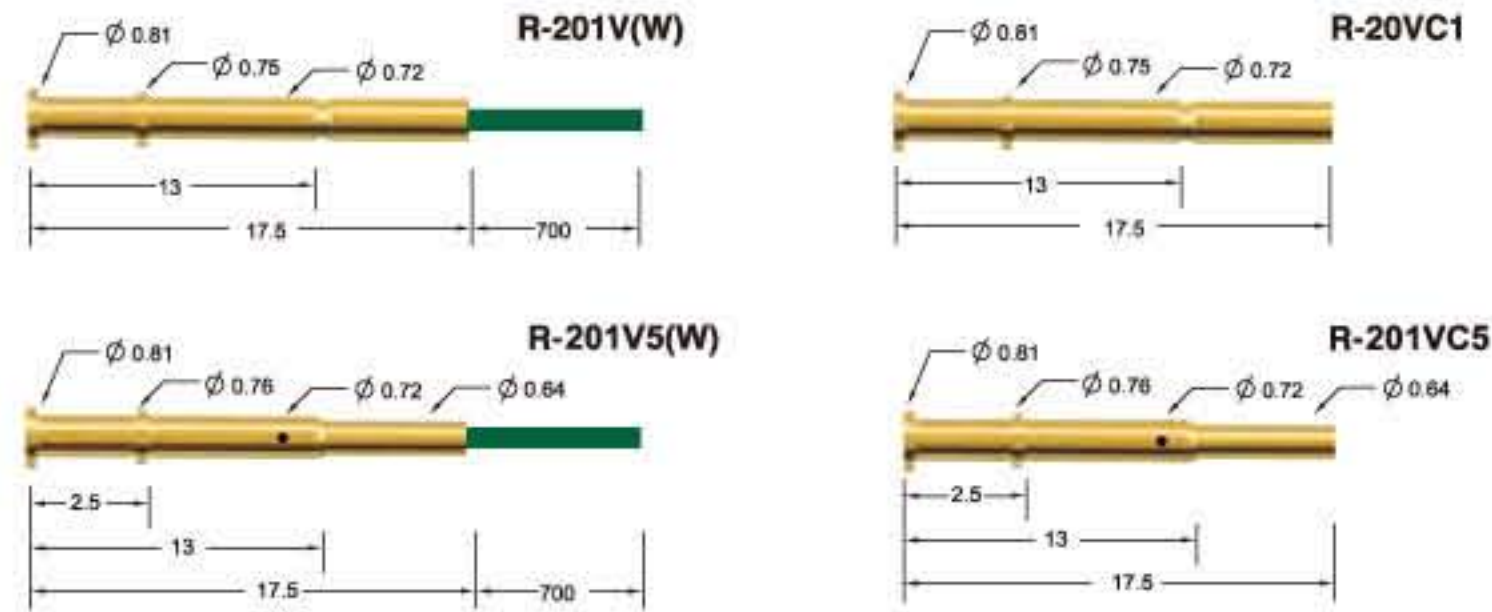

## Probe specifications CPM-201



- Recommended min. center (最小間距) : 1.0 (.0394")
- Mounting hole size (鑽孔尺寸) : 0.75uc (.0295")
- Full travel (行程) : 2 (.0787")
- Materials and finishes (材料及塗飾) :  
Plunger : SK4,Rh plated  
Barrel : Phosphor bronze,Gold plated  
Spring : Stainless,Steel
- Current rating (額定電流) : 1A
- Contact resistance (接觸電阻) : 120 mΩ
- Spring force (全壓彈力) : 80g

## Receptacle specifications

- Materials and finishes : Brass,Gold plated
- ★ 為訂製品代號

# CPM-20

Unit:mm

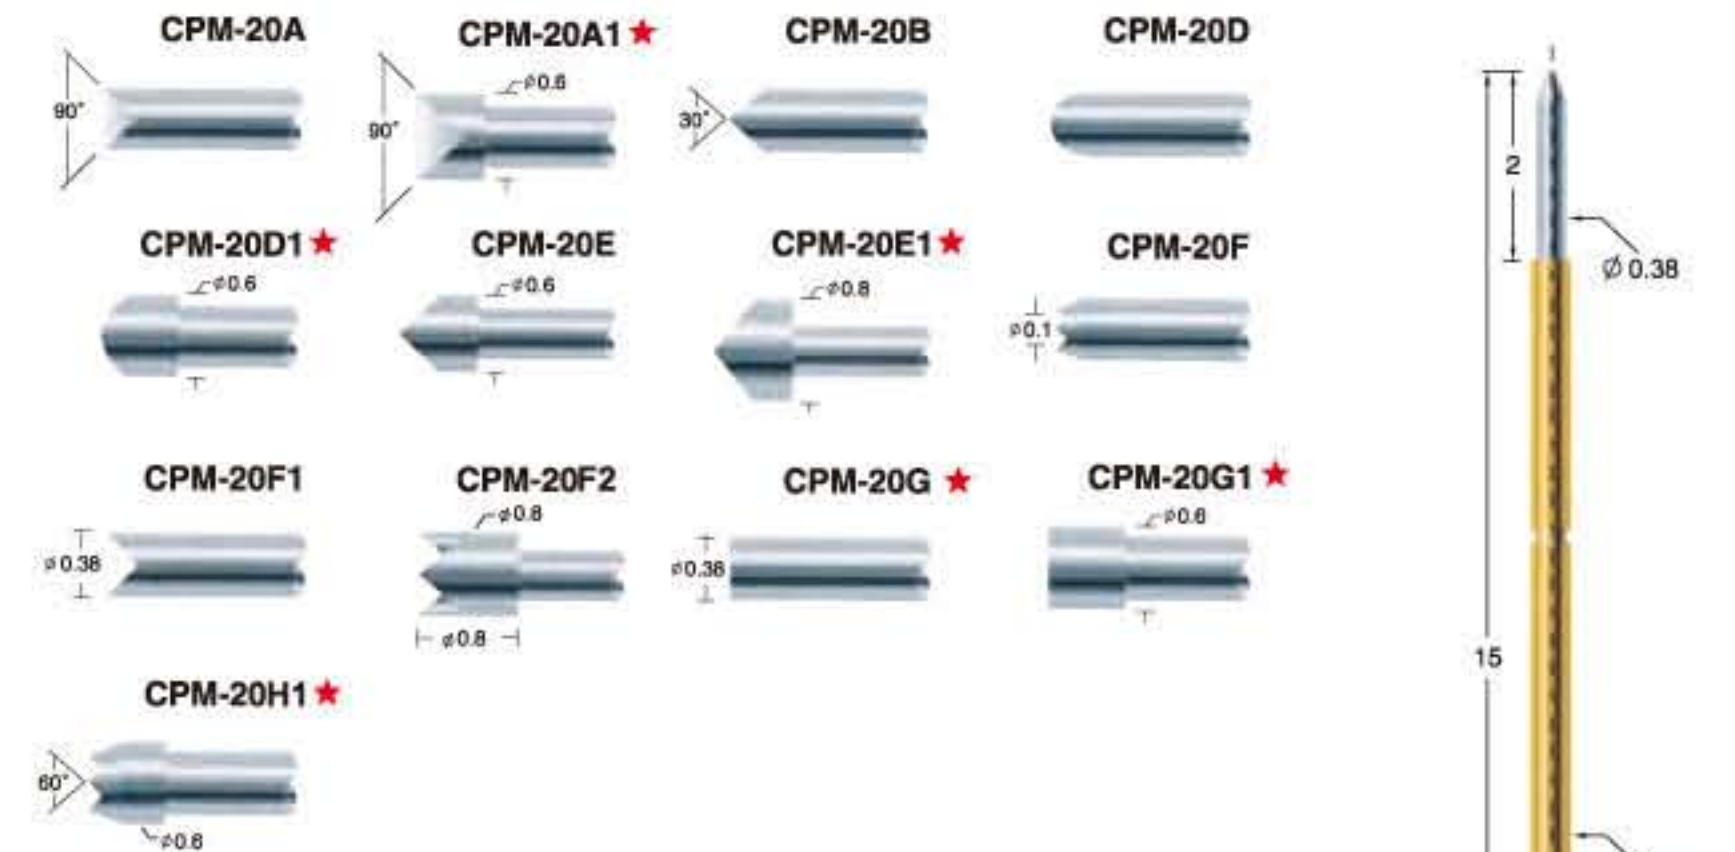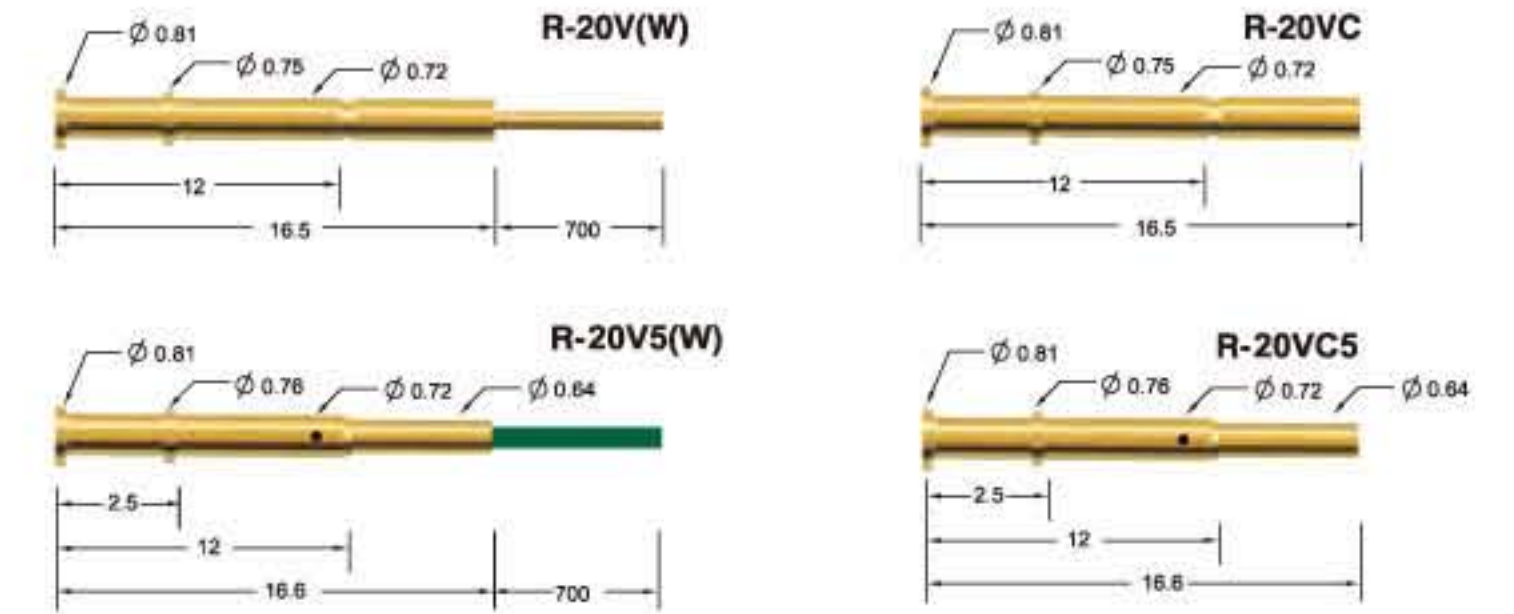

## Probe specifications CPM-20

- Recommended min. center (最小間距) : 1.0 (.0394")
- Mounting hole size (鑽孔尺寸) : 0.75uc (.0296")
- Full travel (行程) : 2 (.0787")
- Materials and finishes (材料及塗飾) :  
Plunger : SK4,Rh plated  
Barrel : Phosphor bronze,Gold plated  
Spring : Stainless,Steel
- Current rating (額定電流) : 1A
- Contact resistance (接觸電阻) : 120 mΩ
- Spring force (全壓彈力) : 80g



## Receptacle specifications

- Materials and finishes : Brass,Gold plated
- ★ 為訂製品代號



# CPM-0

Unit:mm

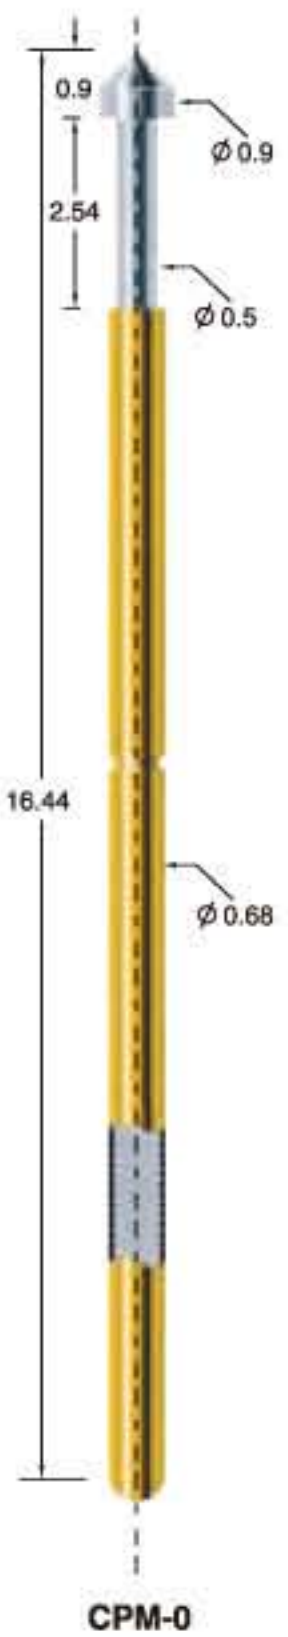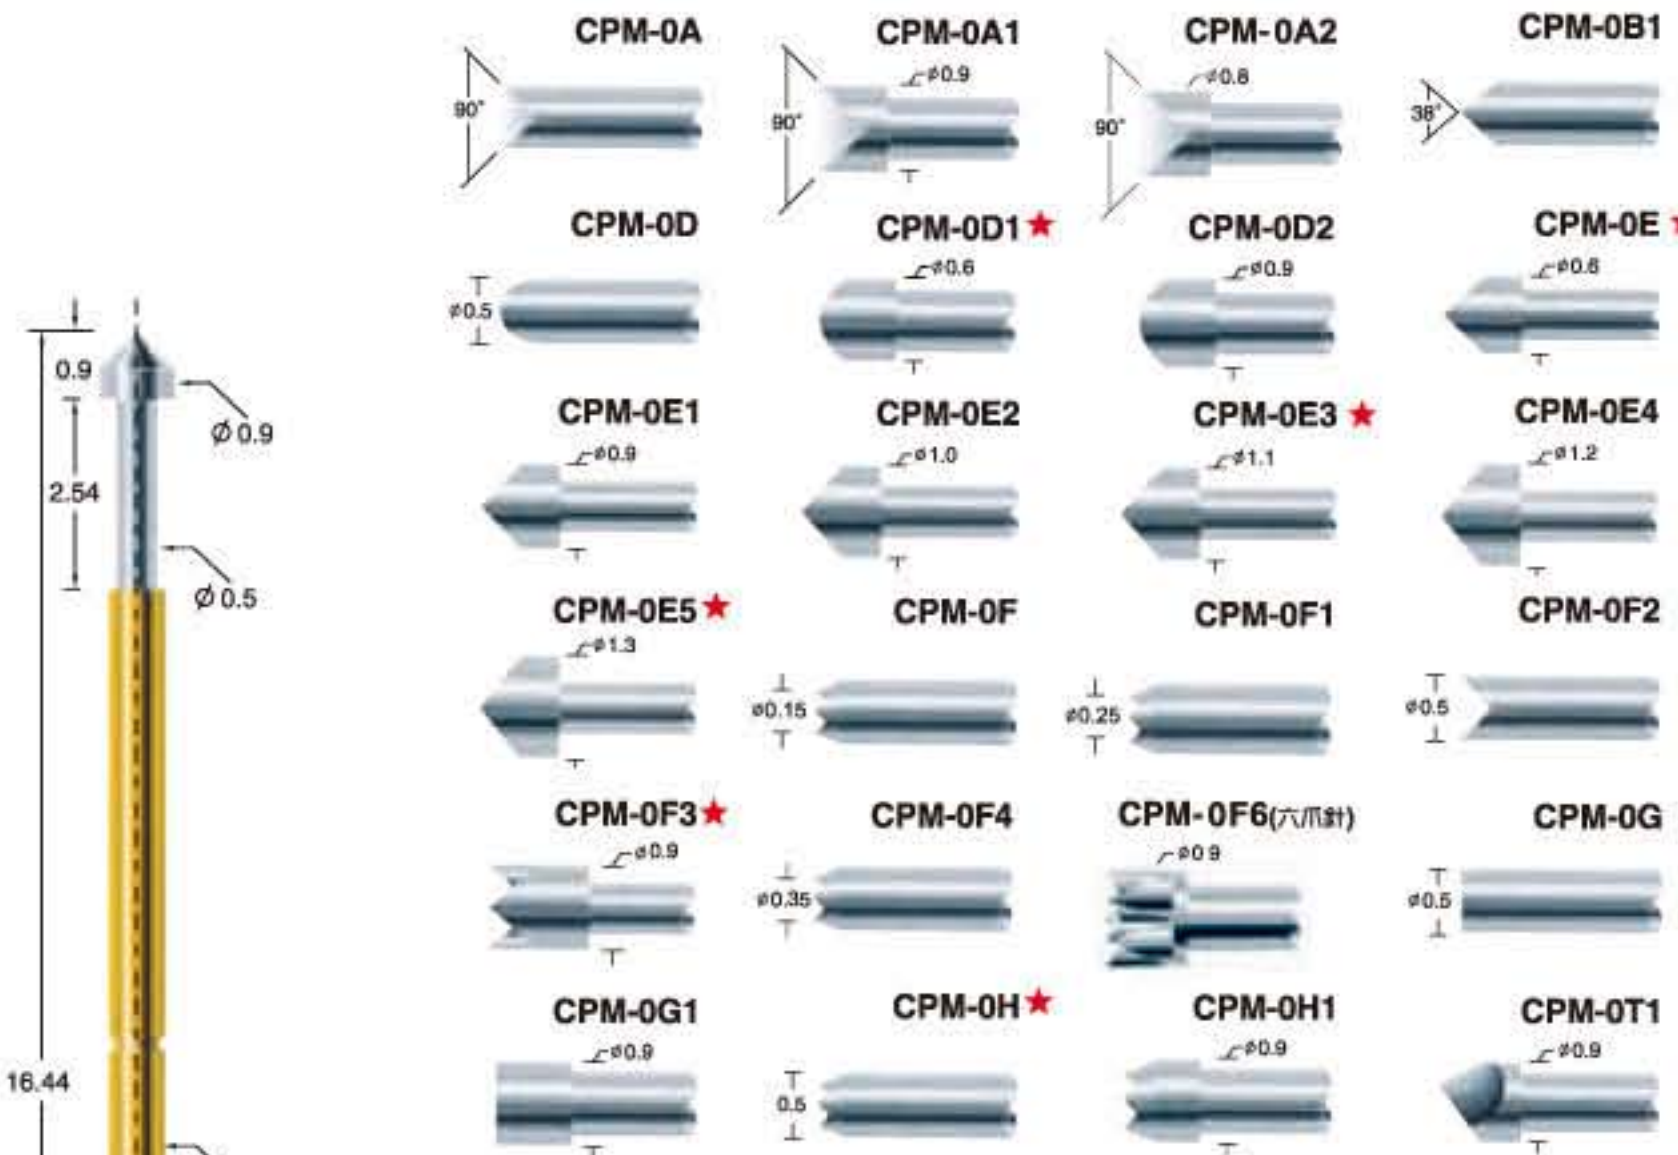

## Probe specifications CPM-0


- Recommended min. center (最小間距) : 1.27 (.050")
- Mounting hole size (鑽孔尺寸) : 0.914 (.036") / 0.95 (.0374")
- Full travel (行程) : 2.54 (0.1")
- Materials and finishes (材料及塗飾) :  
 Plunger : SK,Rh plated ,Phosphor bronze  
 Barrel : Phosphor bronze,Gold plated  
 Spring : Stainless,Steel
- Current rating (額定電流) : 1.5A
- Contact resistance (接觸電阻) : 70 mΩ
- Spring force (全壓彈力) : 128g

## Receptacle specifications

- Materials and finishes : Brass,Gold plated
- ★ 為訂製品代號

# R-0

Unit:mm

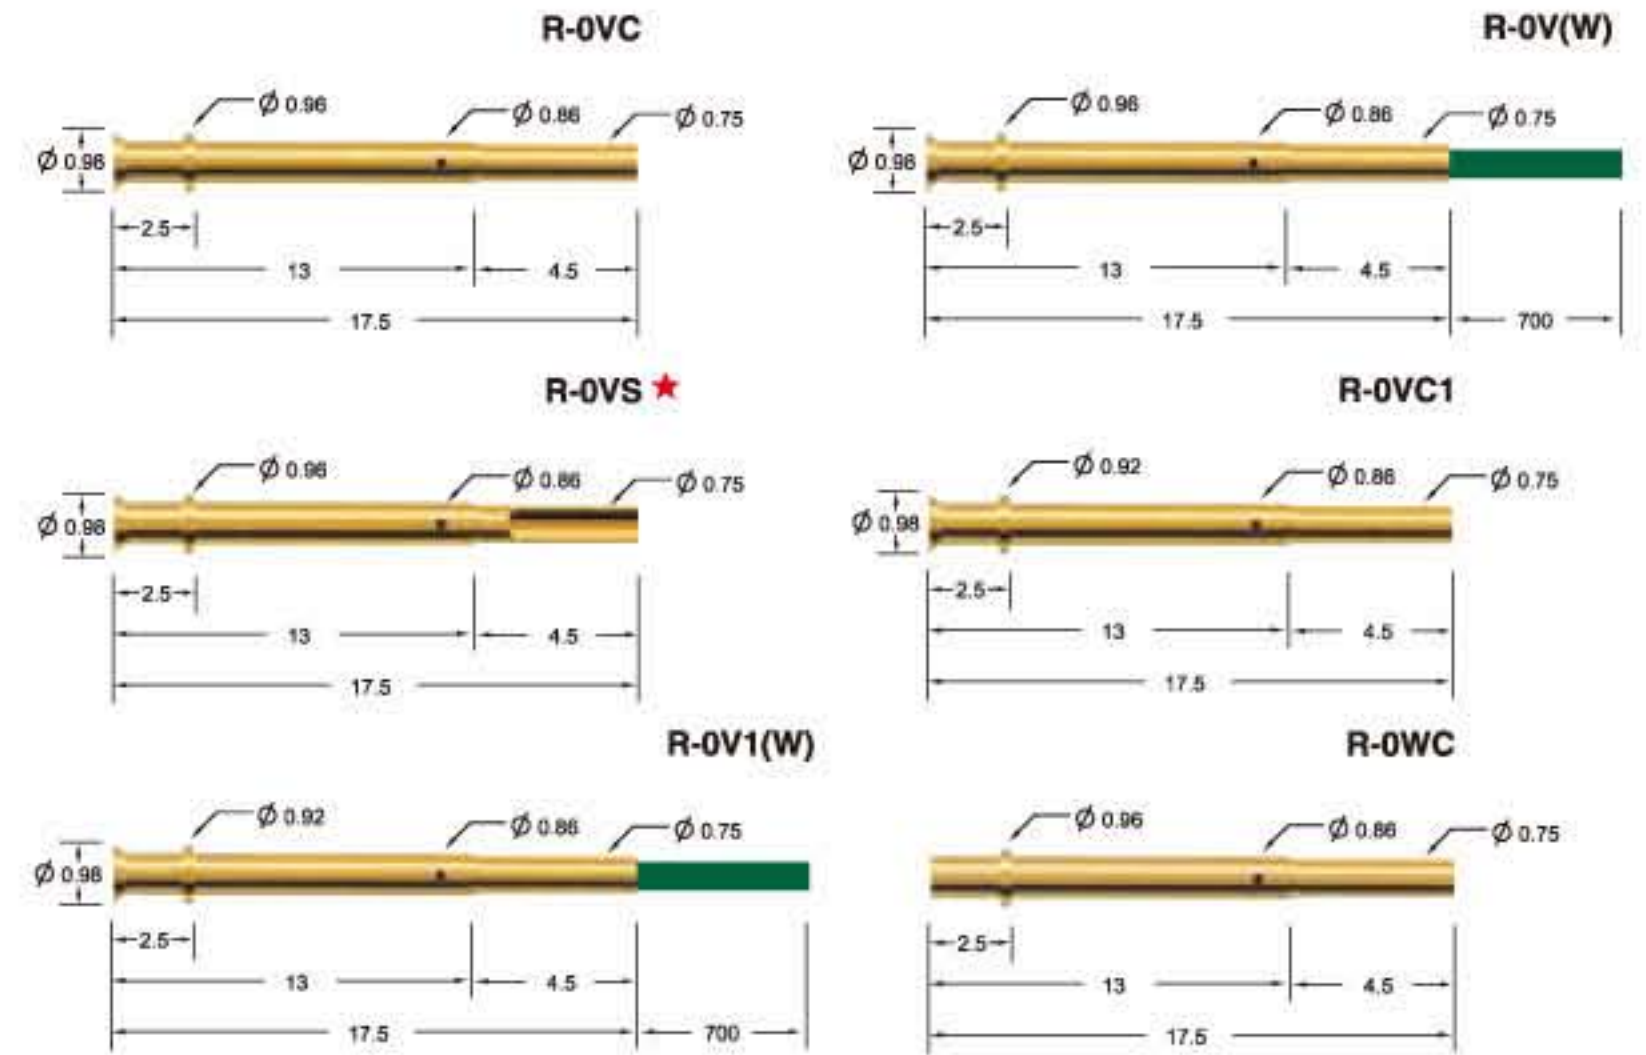

## Probe specifications R-0

- Recommended min. center (最小間距) : 1.27 (.050")
- Mounting hole size (鑽孔尺寸) : 0.914 (.036") / 0.95 (.0374")
- Materials and finishes (材料及塗飾) :  
 Phosphor bronze,Gold plated
- Connections (接線形式) :  
 Crimp:R-0VC,R-0WC  
 Solder cup:R-0VS,R-0WS  
 Wire wrap:R-0V(W),R-0V1(W),R-0W(W)
- ★ 為訂製品代號

