
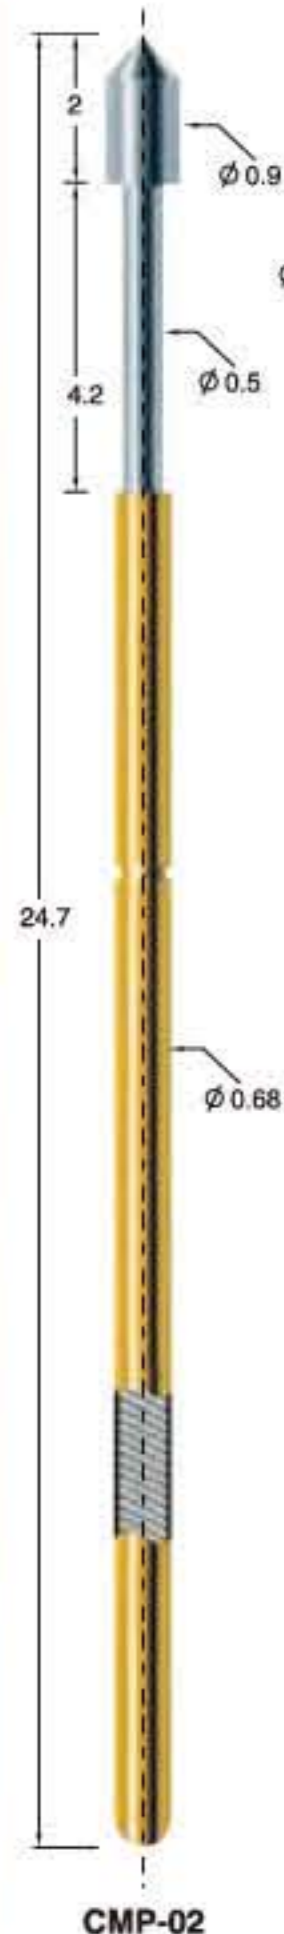


CPM-02

Unit:mm

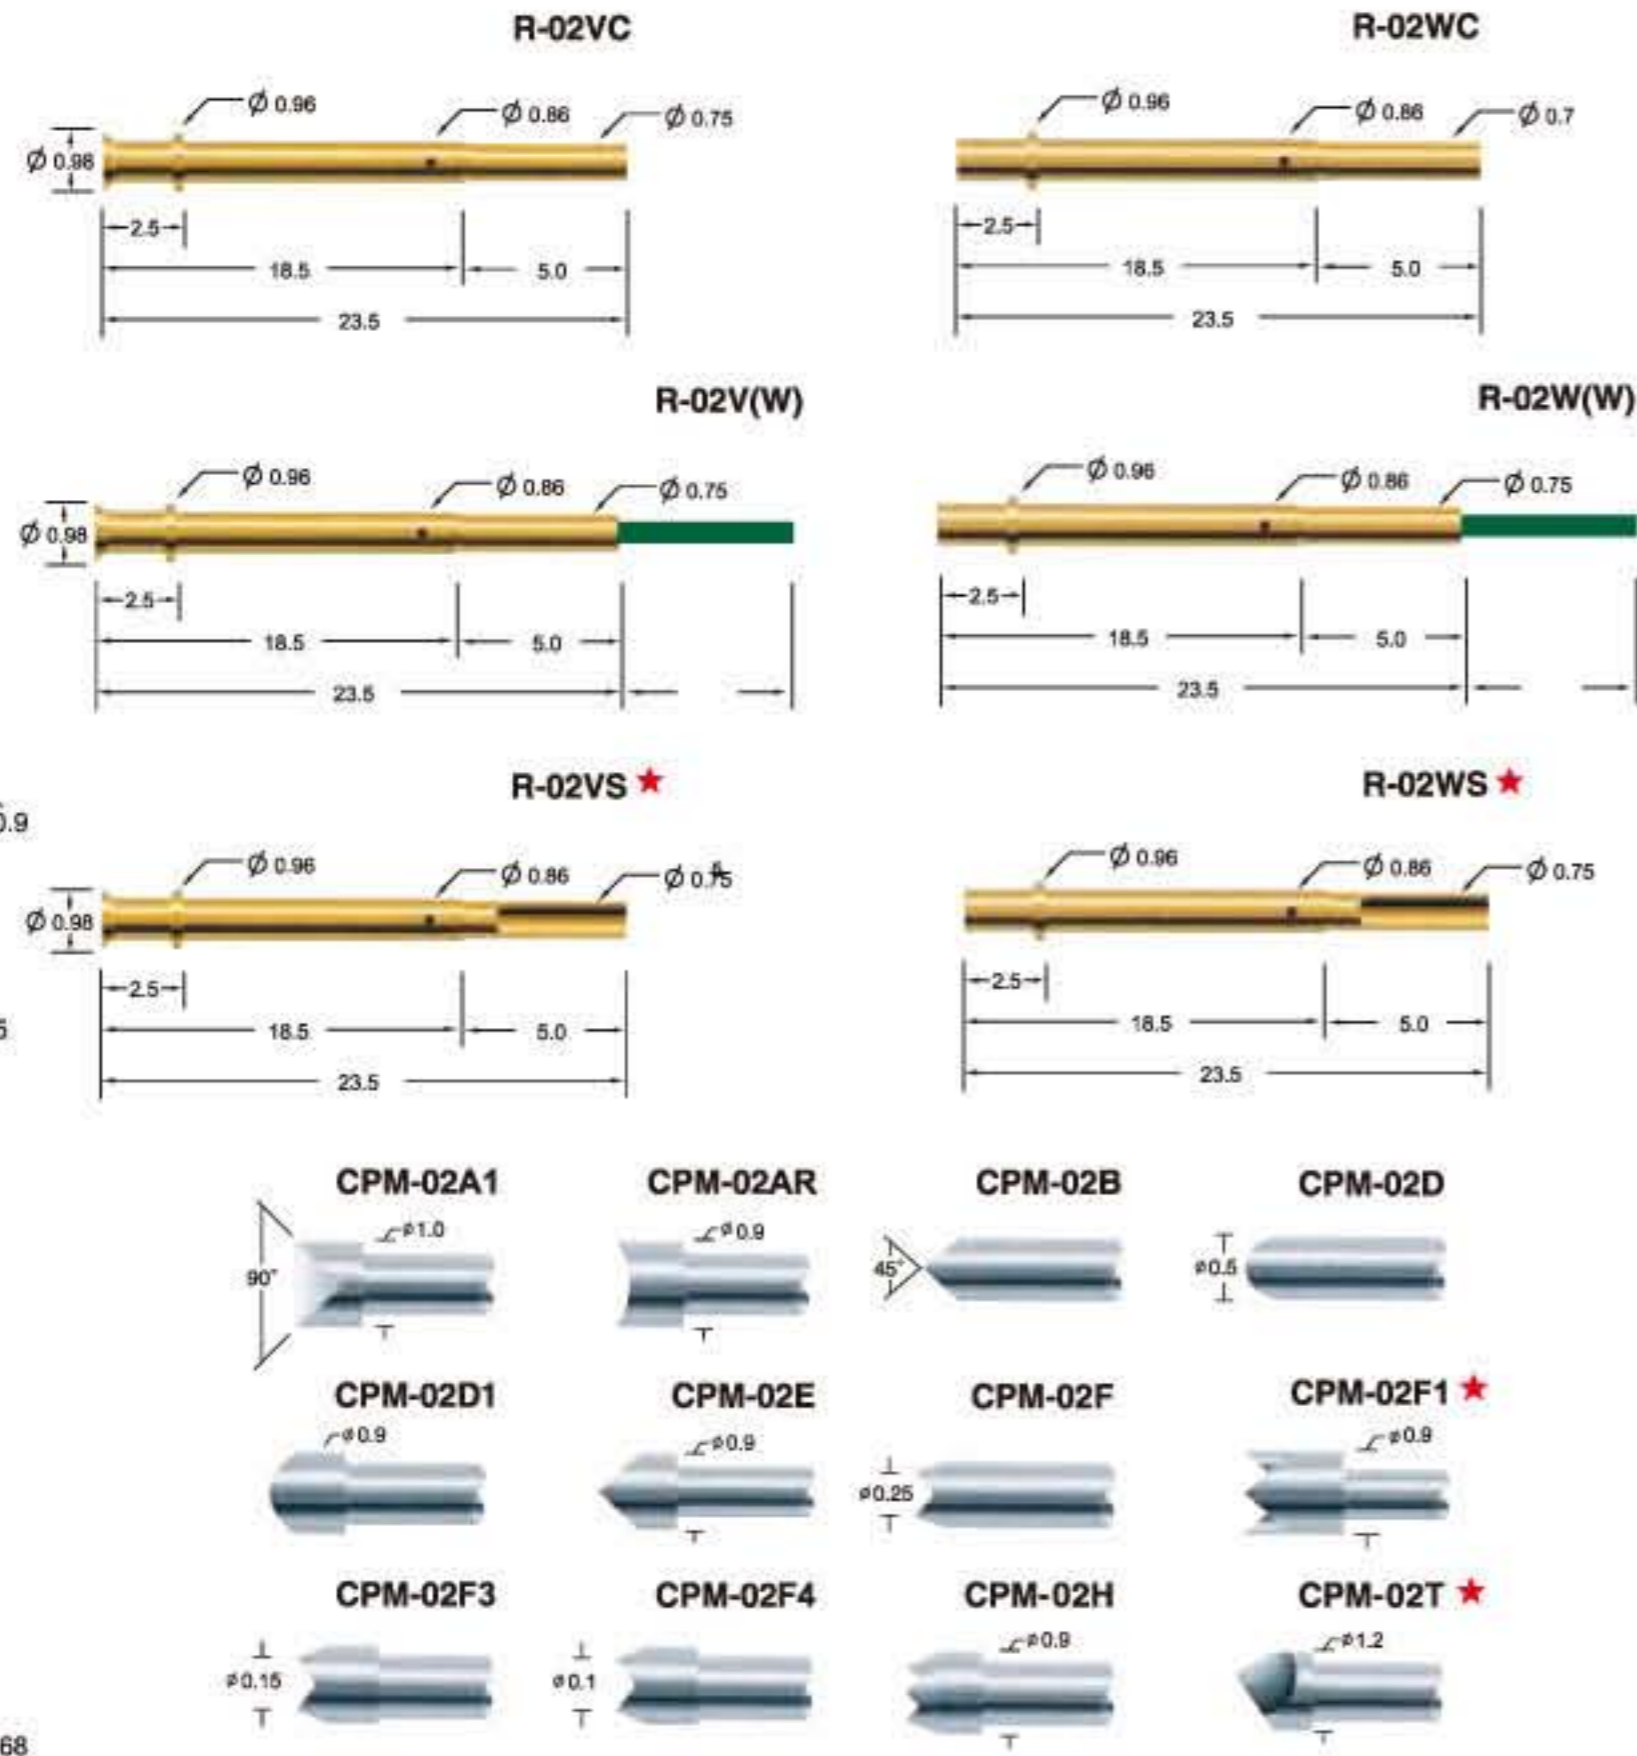

Probe specifications CPM-02



- Recommended min. center (最小間距) : 1.27 (.050")
- Mounting hole size (鑽孔尺寸) : 0.95 (.0374")
- Full travel (行程) : 4.2 (0.165")
- Materials and finishes (材料及塗飾) :
Plunger : SK4,Rh plated
Barrel : Phosphor bronze,Gold plated
Spring : Stainless Steel
- Current rating (額定電流) : 3A
- Contact resistance (接觸電阻) : 30mΩ
- Spring force (全壓彈力) : 128g

Receptacle specifications

- Materials and finishes : Brass,Gold plated
- ★ 為訂製品代號

CPM-1

Unit:mm

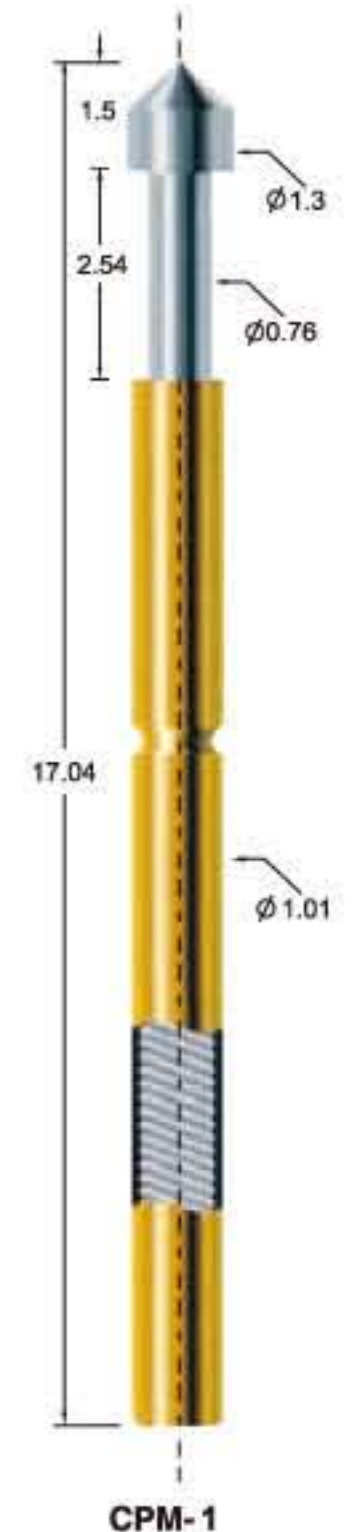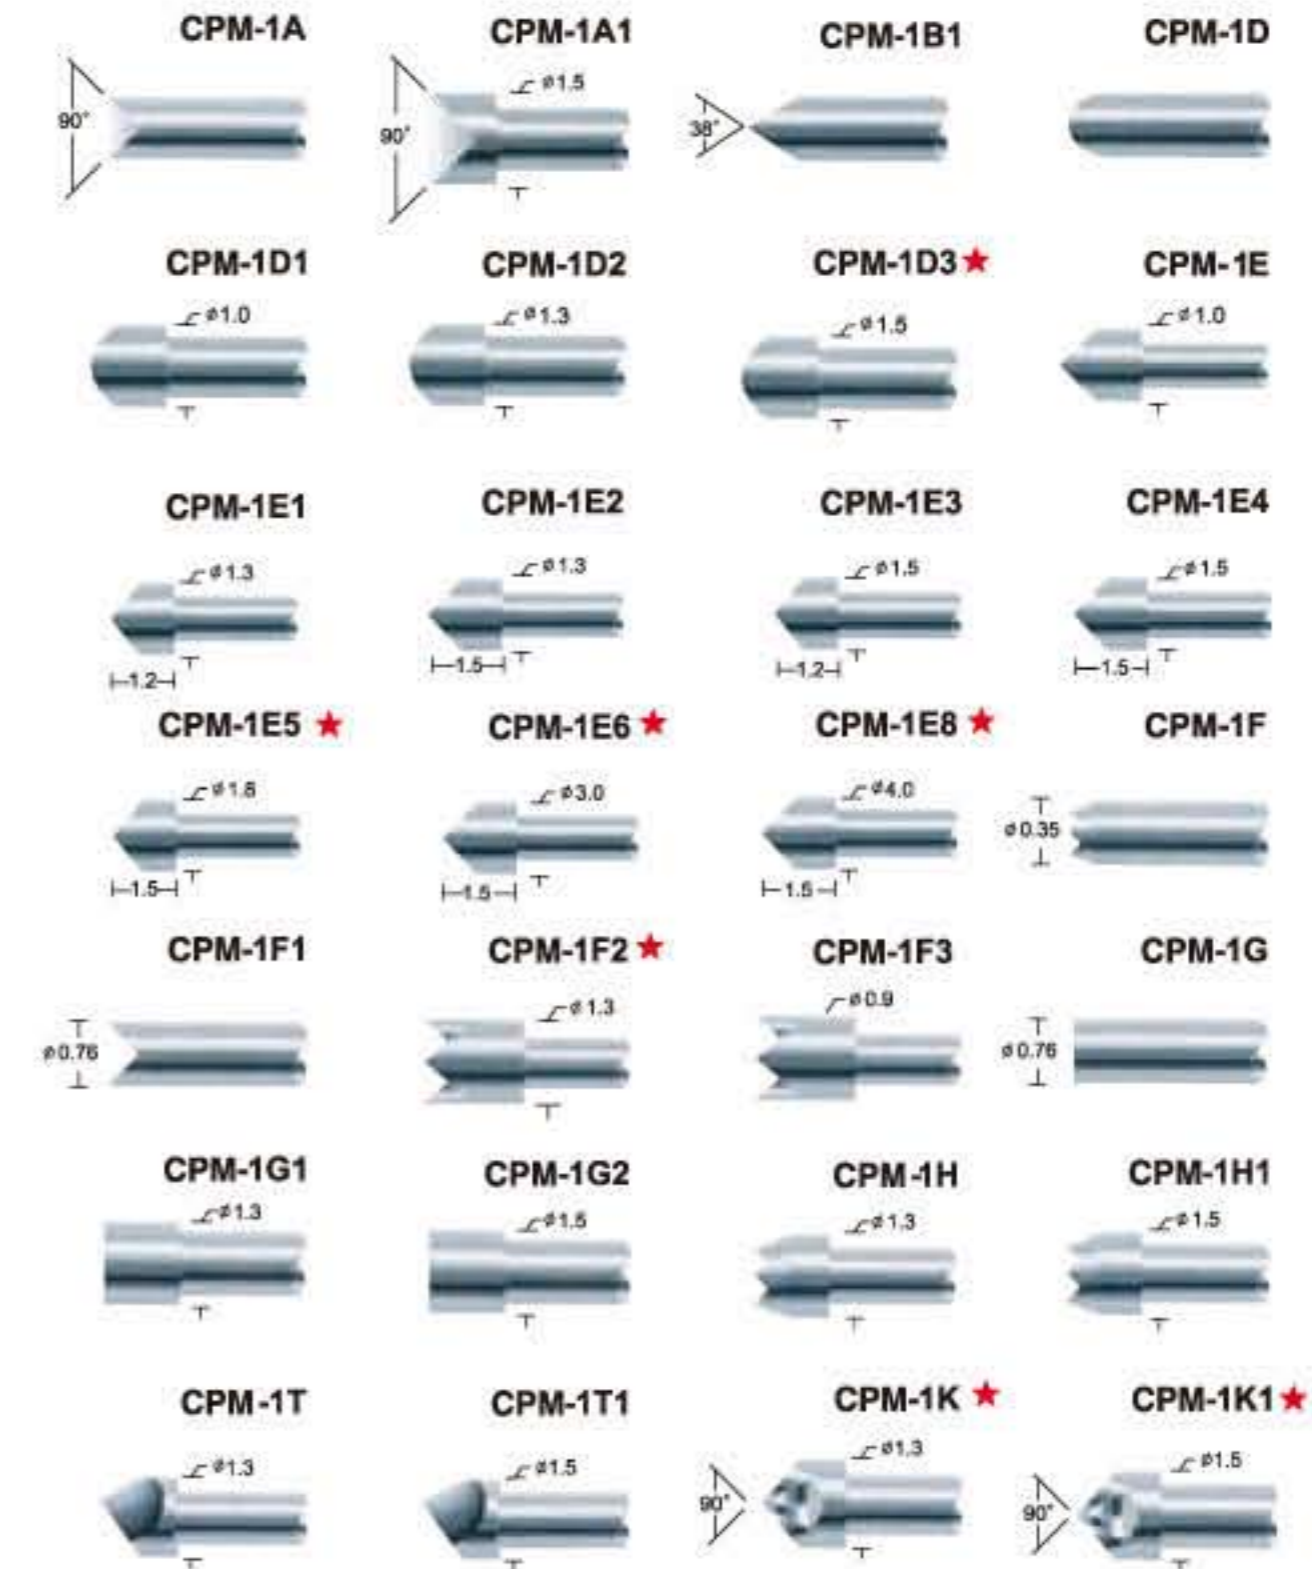


Probe specifications CPM-02

- Recommended min. center (最小間距) : 1.9 (.0748")
- Mounting hole size (鑽孔尺寸) : 1.35 (.0531")/1.4 (.0551")
- Full travel (行程) : 2.54 (0.1")
- Materials and finishes (材料及塗飾) :
Plunger : SK,Rh plated, phosphor bronze
Barrel : Phosphor bronze,Gold plated
Spring : Stainless Steel
- Current rating (額定電流) : 3A
- Contact resistance (接觸電阻) : 50mΩ
- Spring force (全壓彈力) : 128g
- ★ 為訂製品代號



R-2

Unit:mm

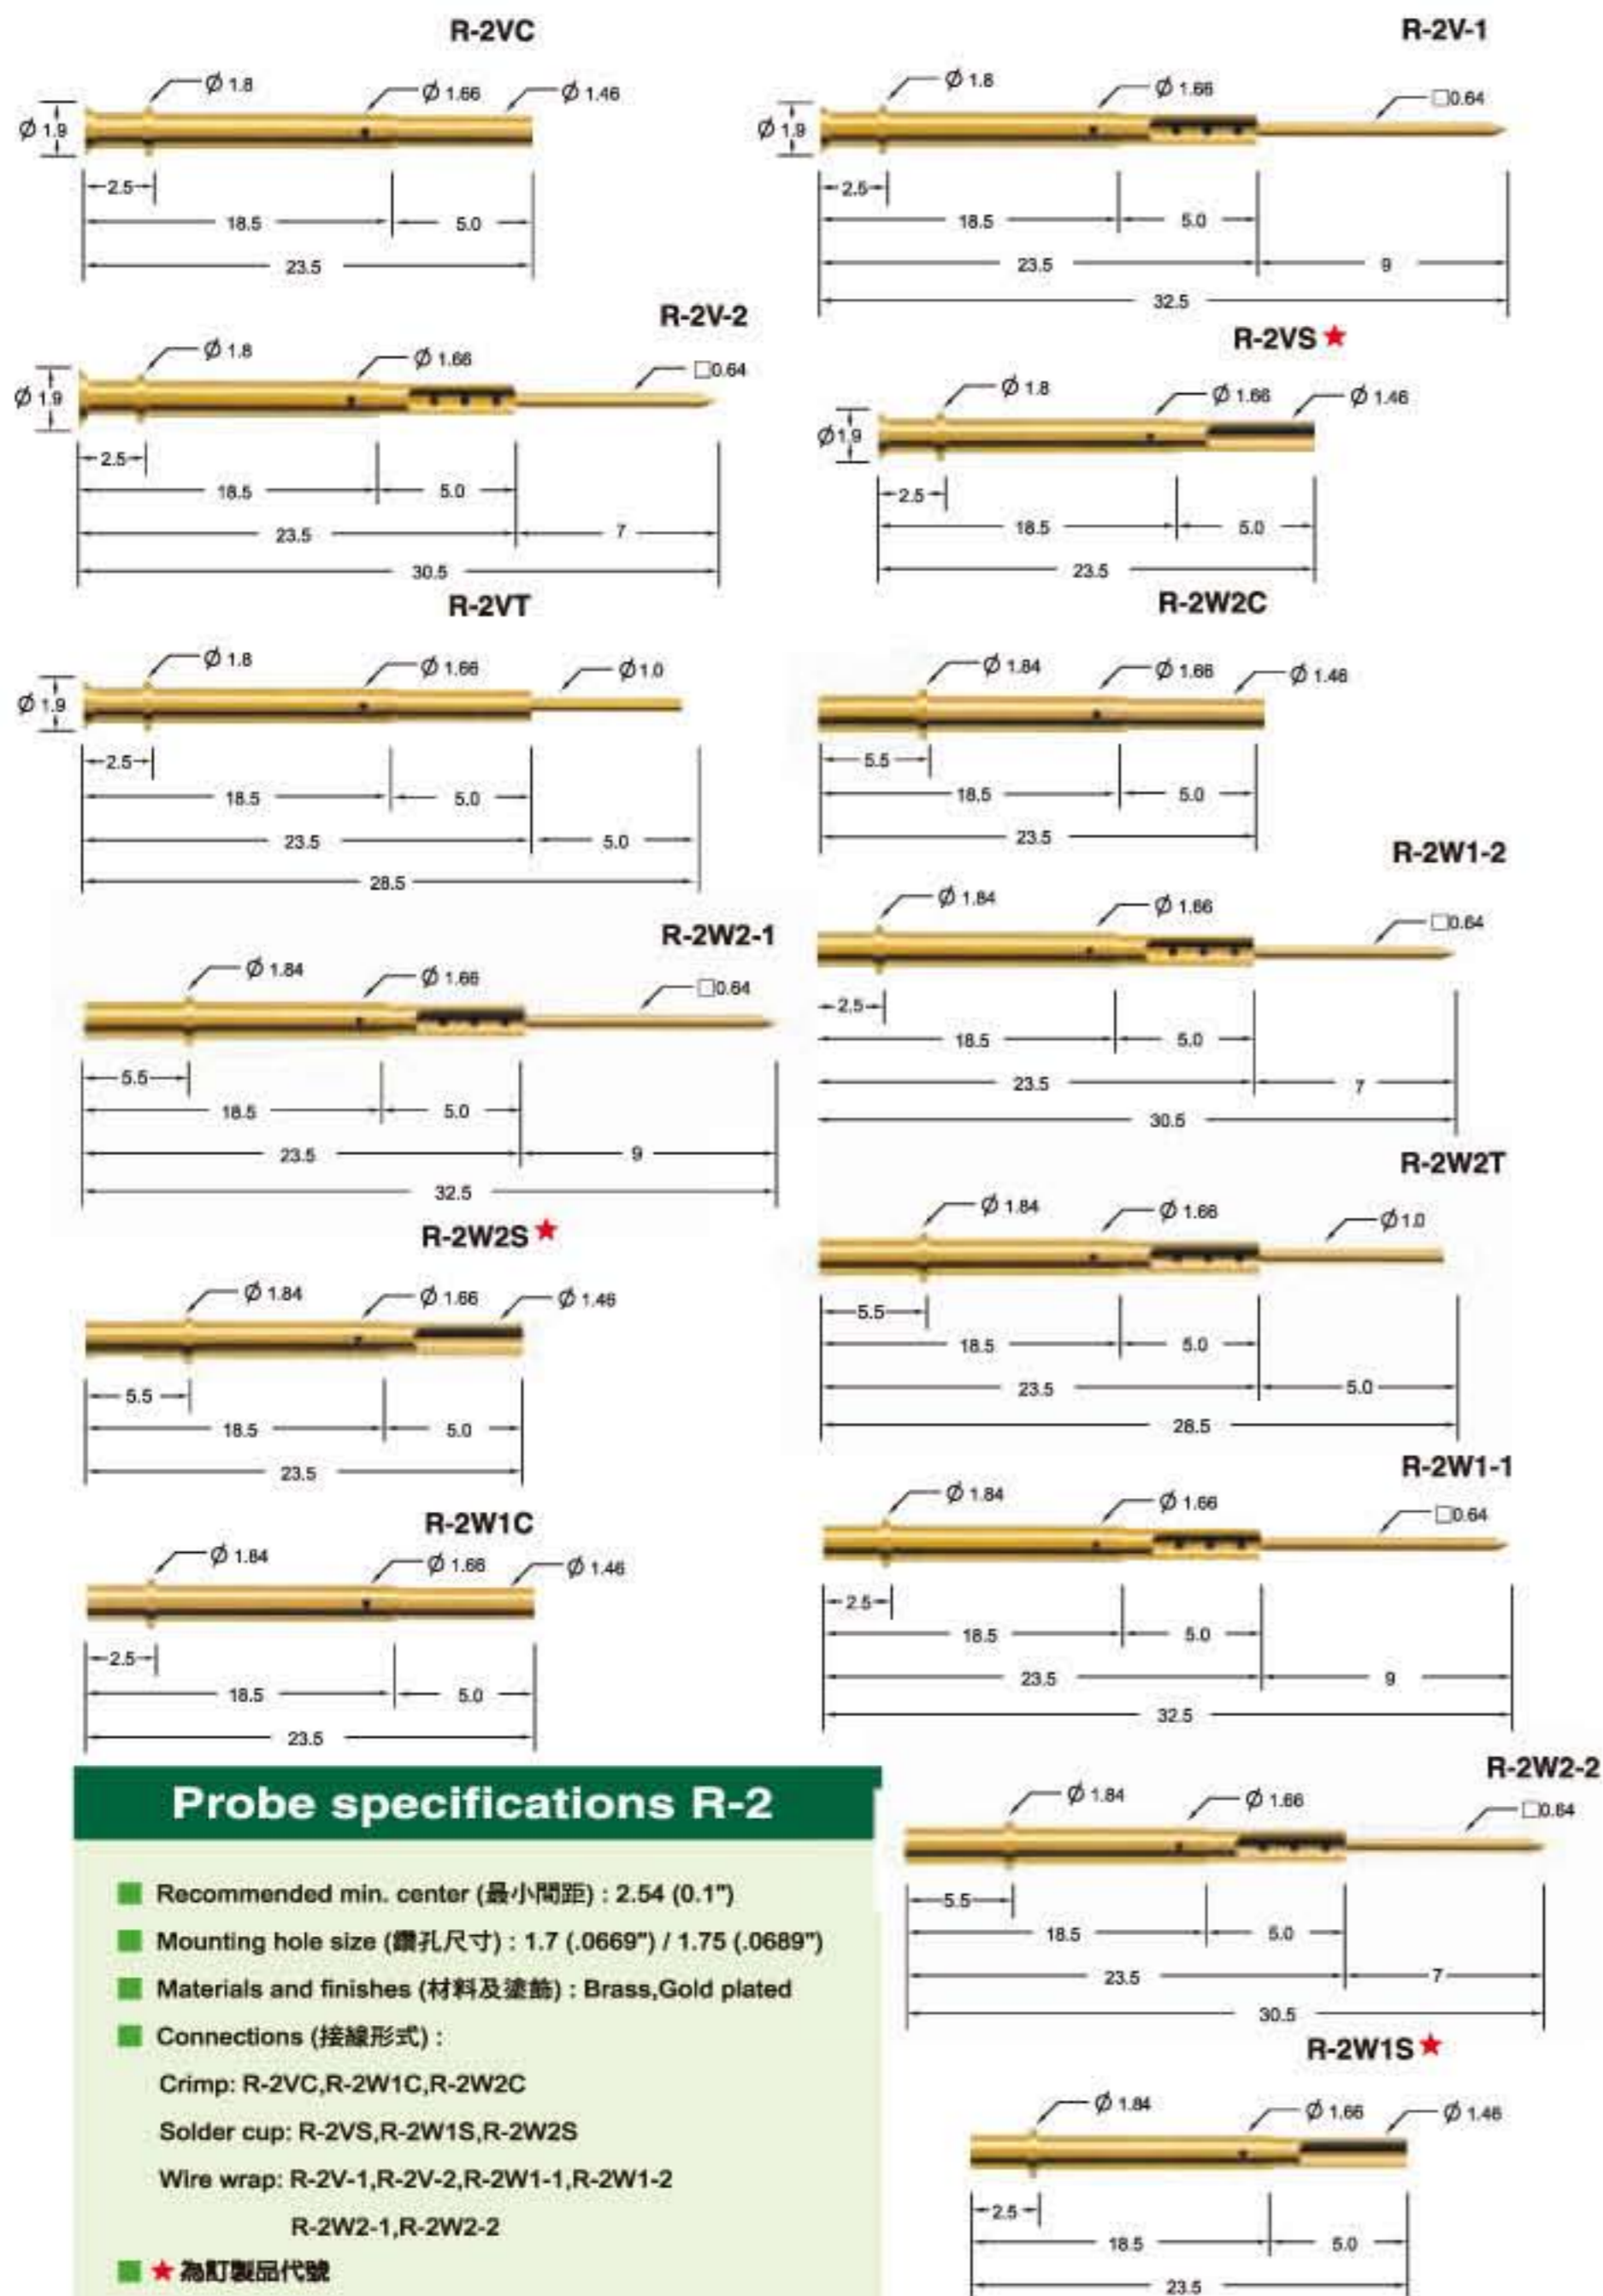

CPM-11

Unit:mm

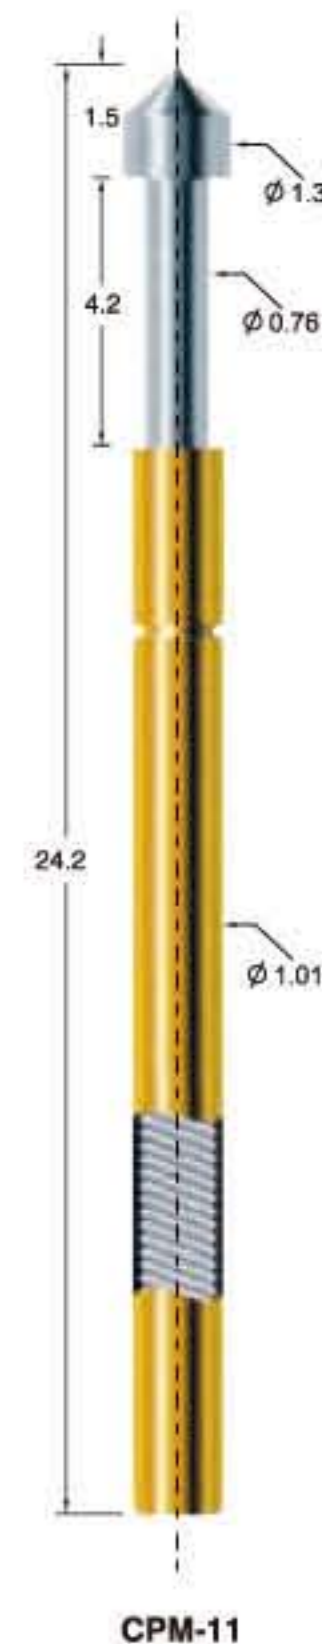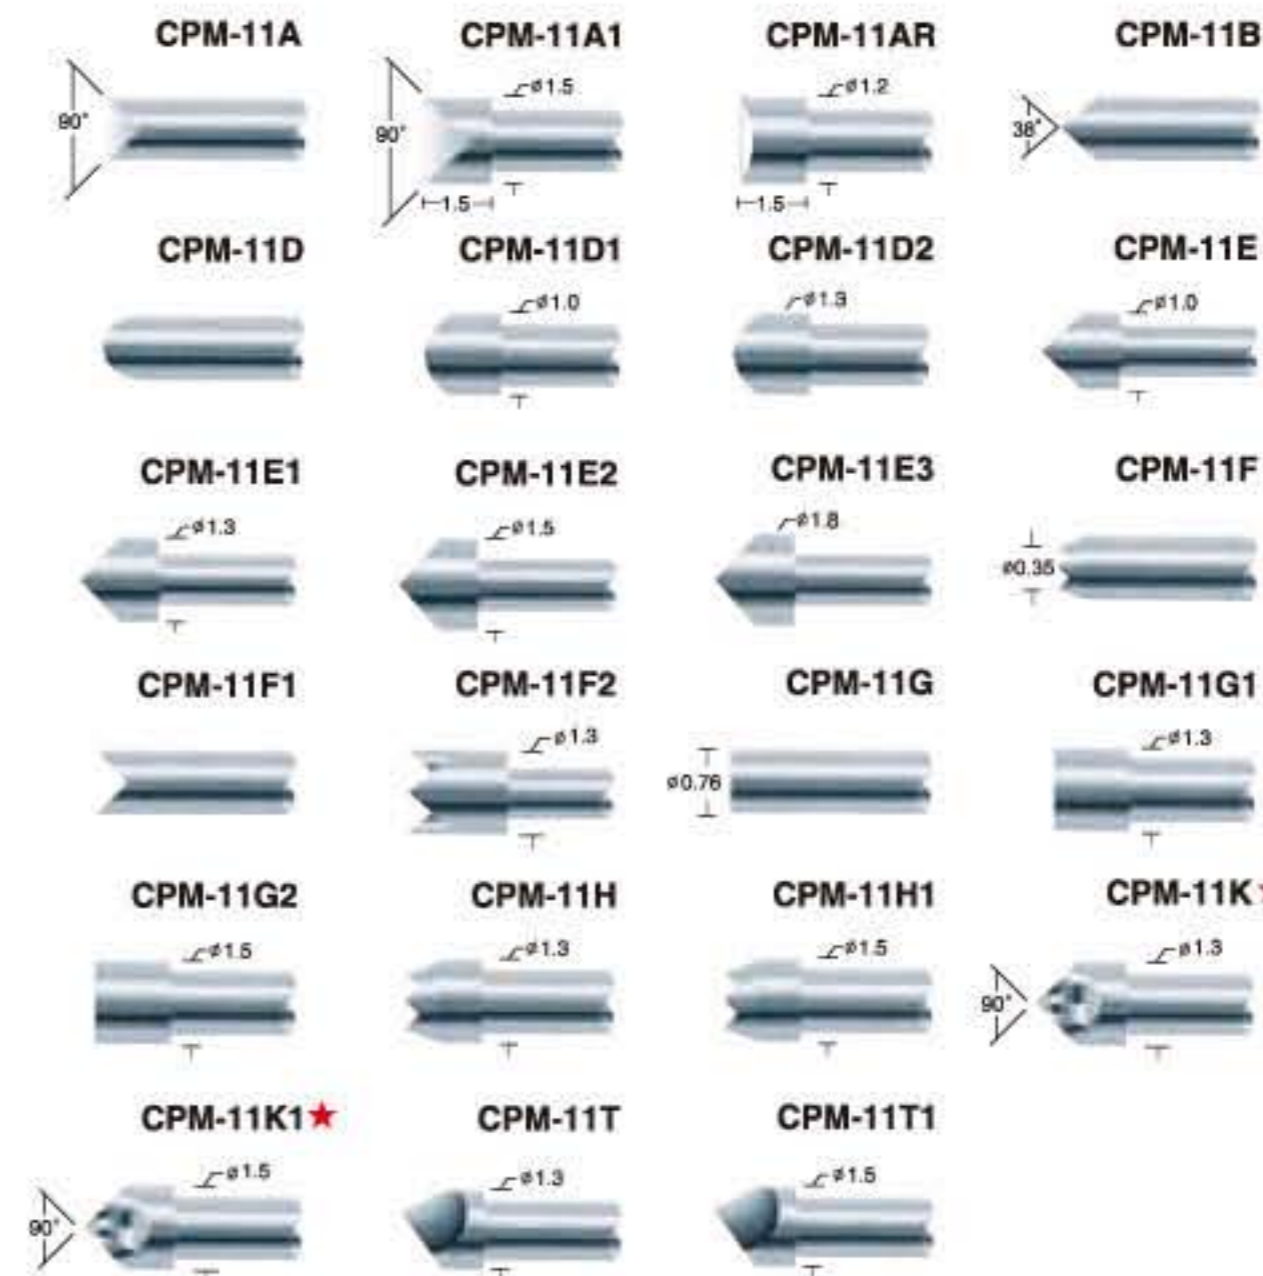

Probe specifications CPM-11

- Recommended min. center (最小間距) : 1.9 (.0748")
- Mounting hole size (鑽孔尺寸) : 1.35 (.0531") / 1.4 (.0551")
- Full travel (行程) : 4.2 (0.165")
- Materials and finishes (材料及塗飾) :
 Plunger : Be Cu, Rh plated
 Barrel : Phosphor bronze, Gold plated
 Spring : Stainless Steel
- Current rating (額定電流) : 3A
- Contact resistance (接觸電阻) : 50 mΩ
- ★ 為訂製品代號
- Spring force (全壓彈力) : 150g