



# CPM-111 R-111

Unit:mm

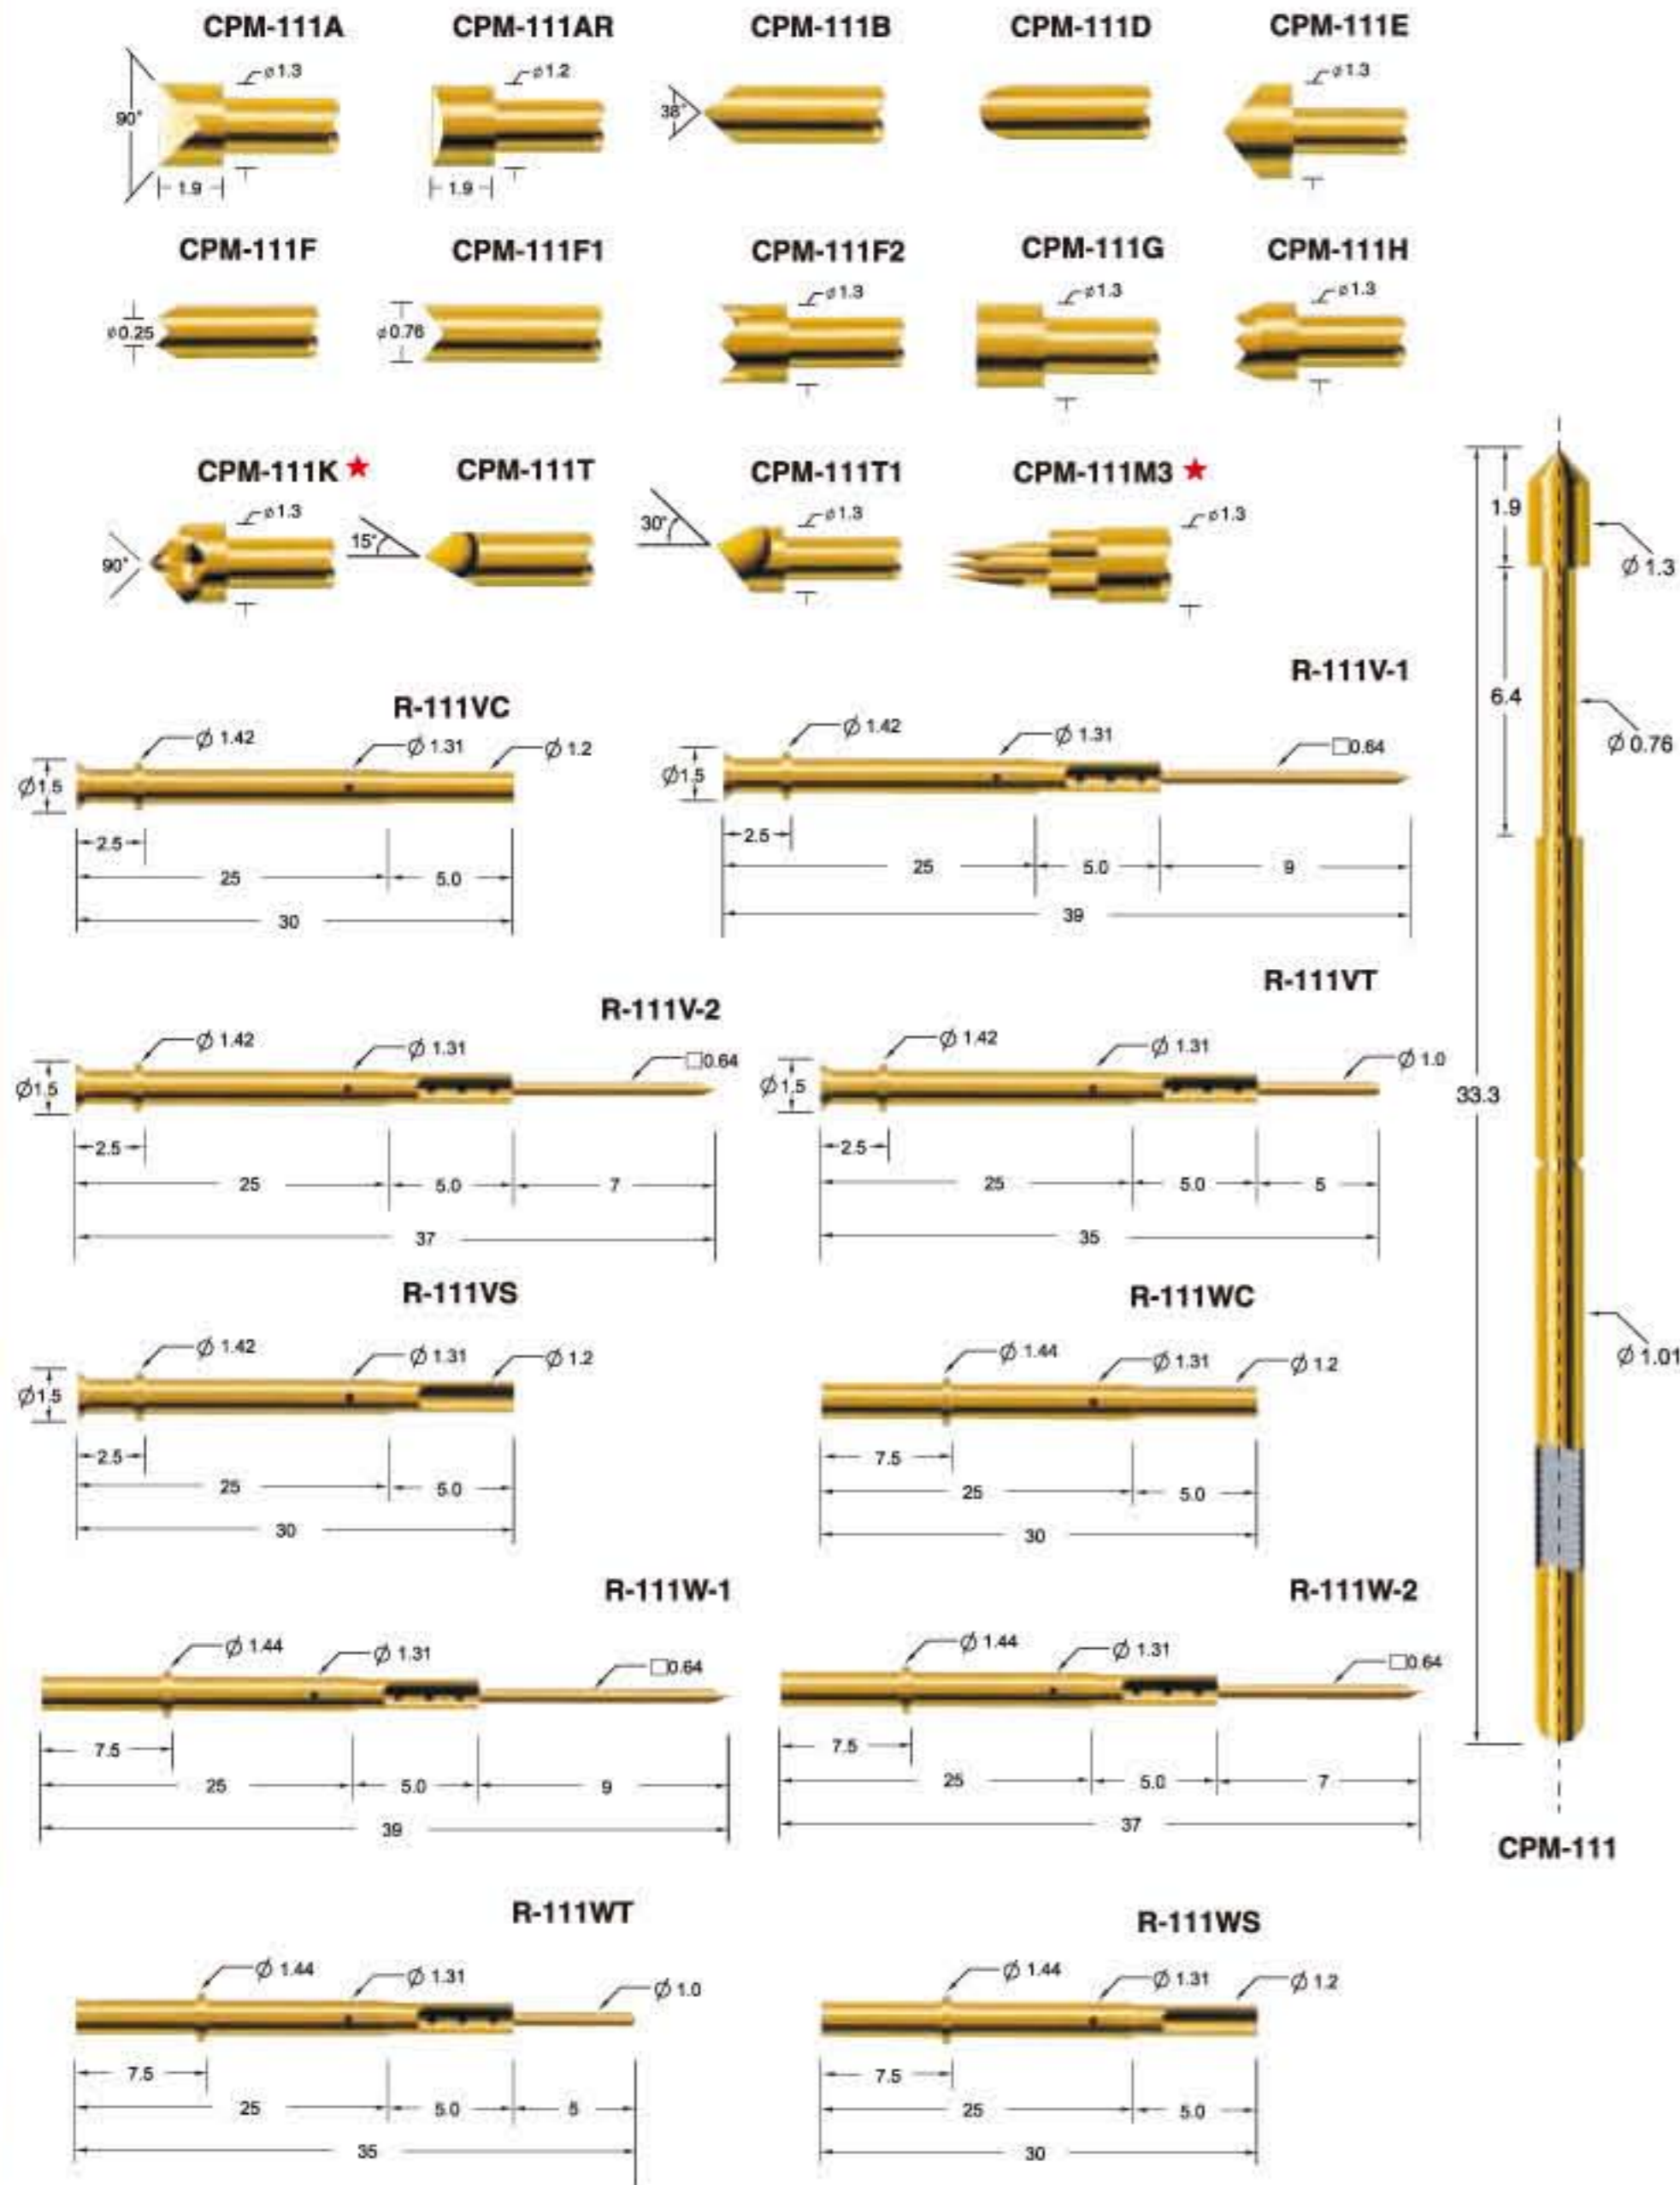


# CPM-25 R-8

Unit:mm

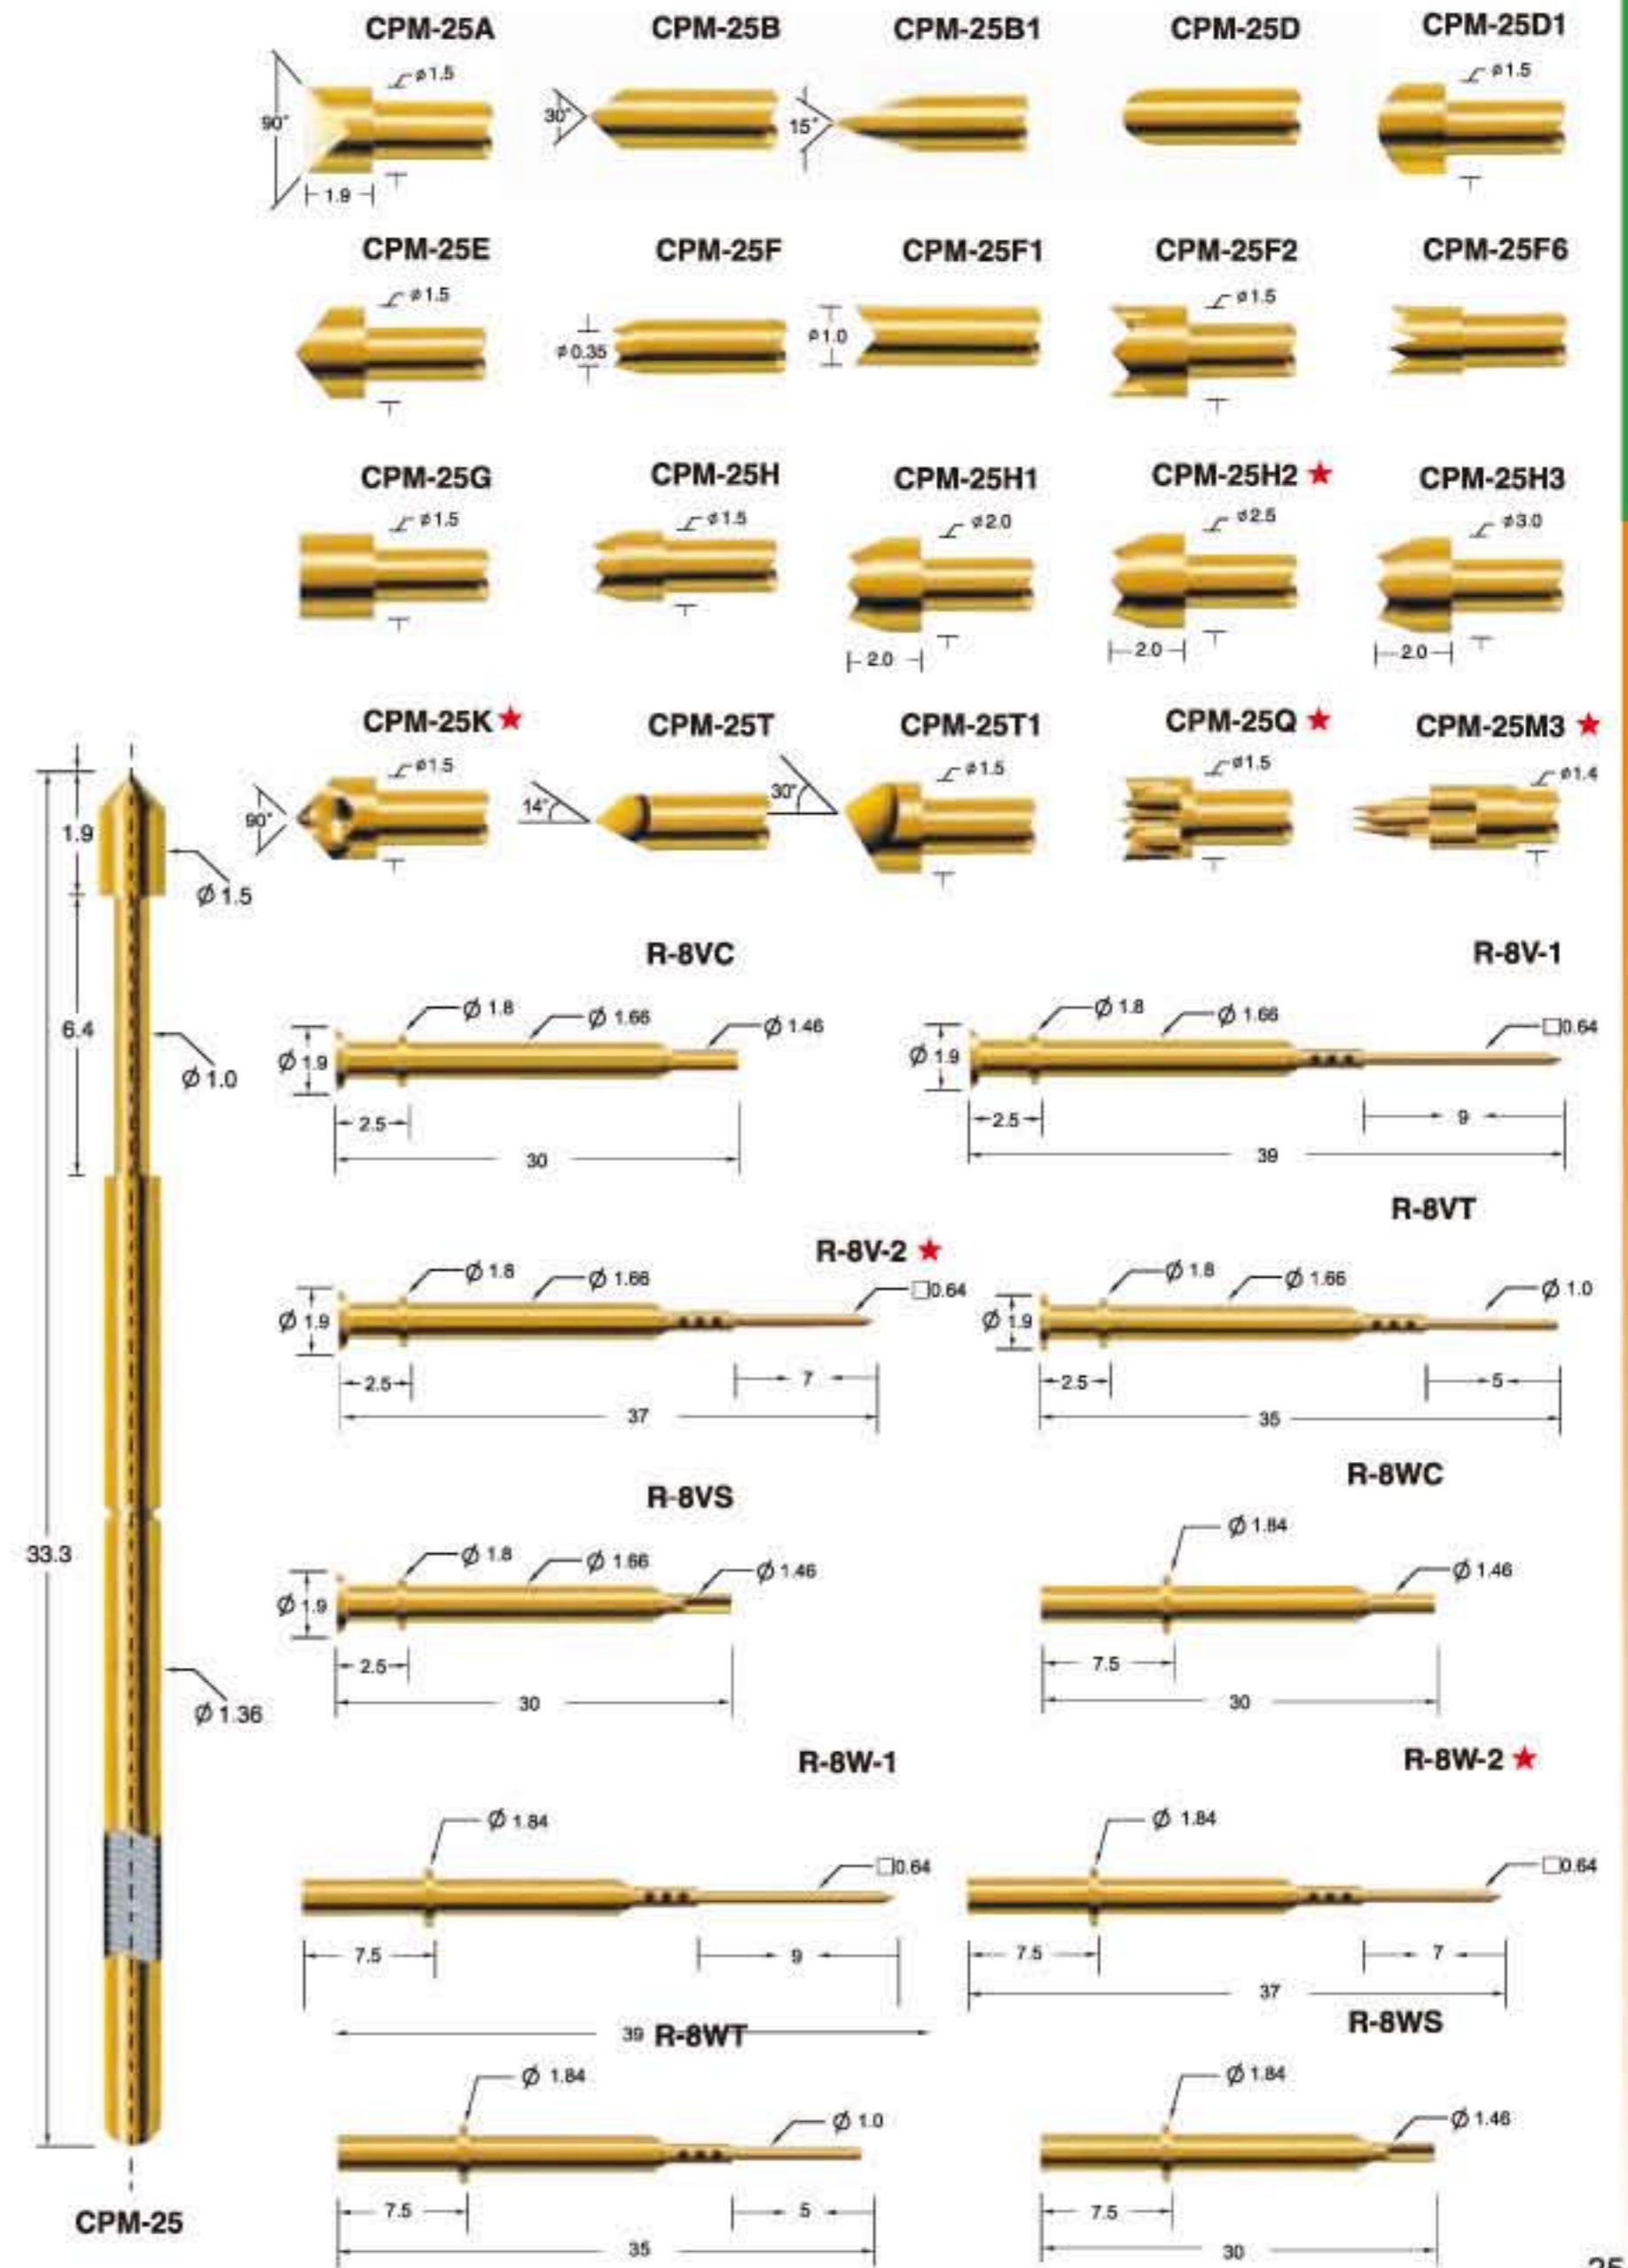




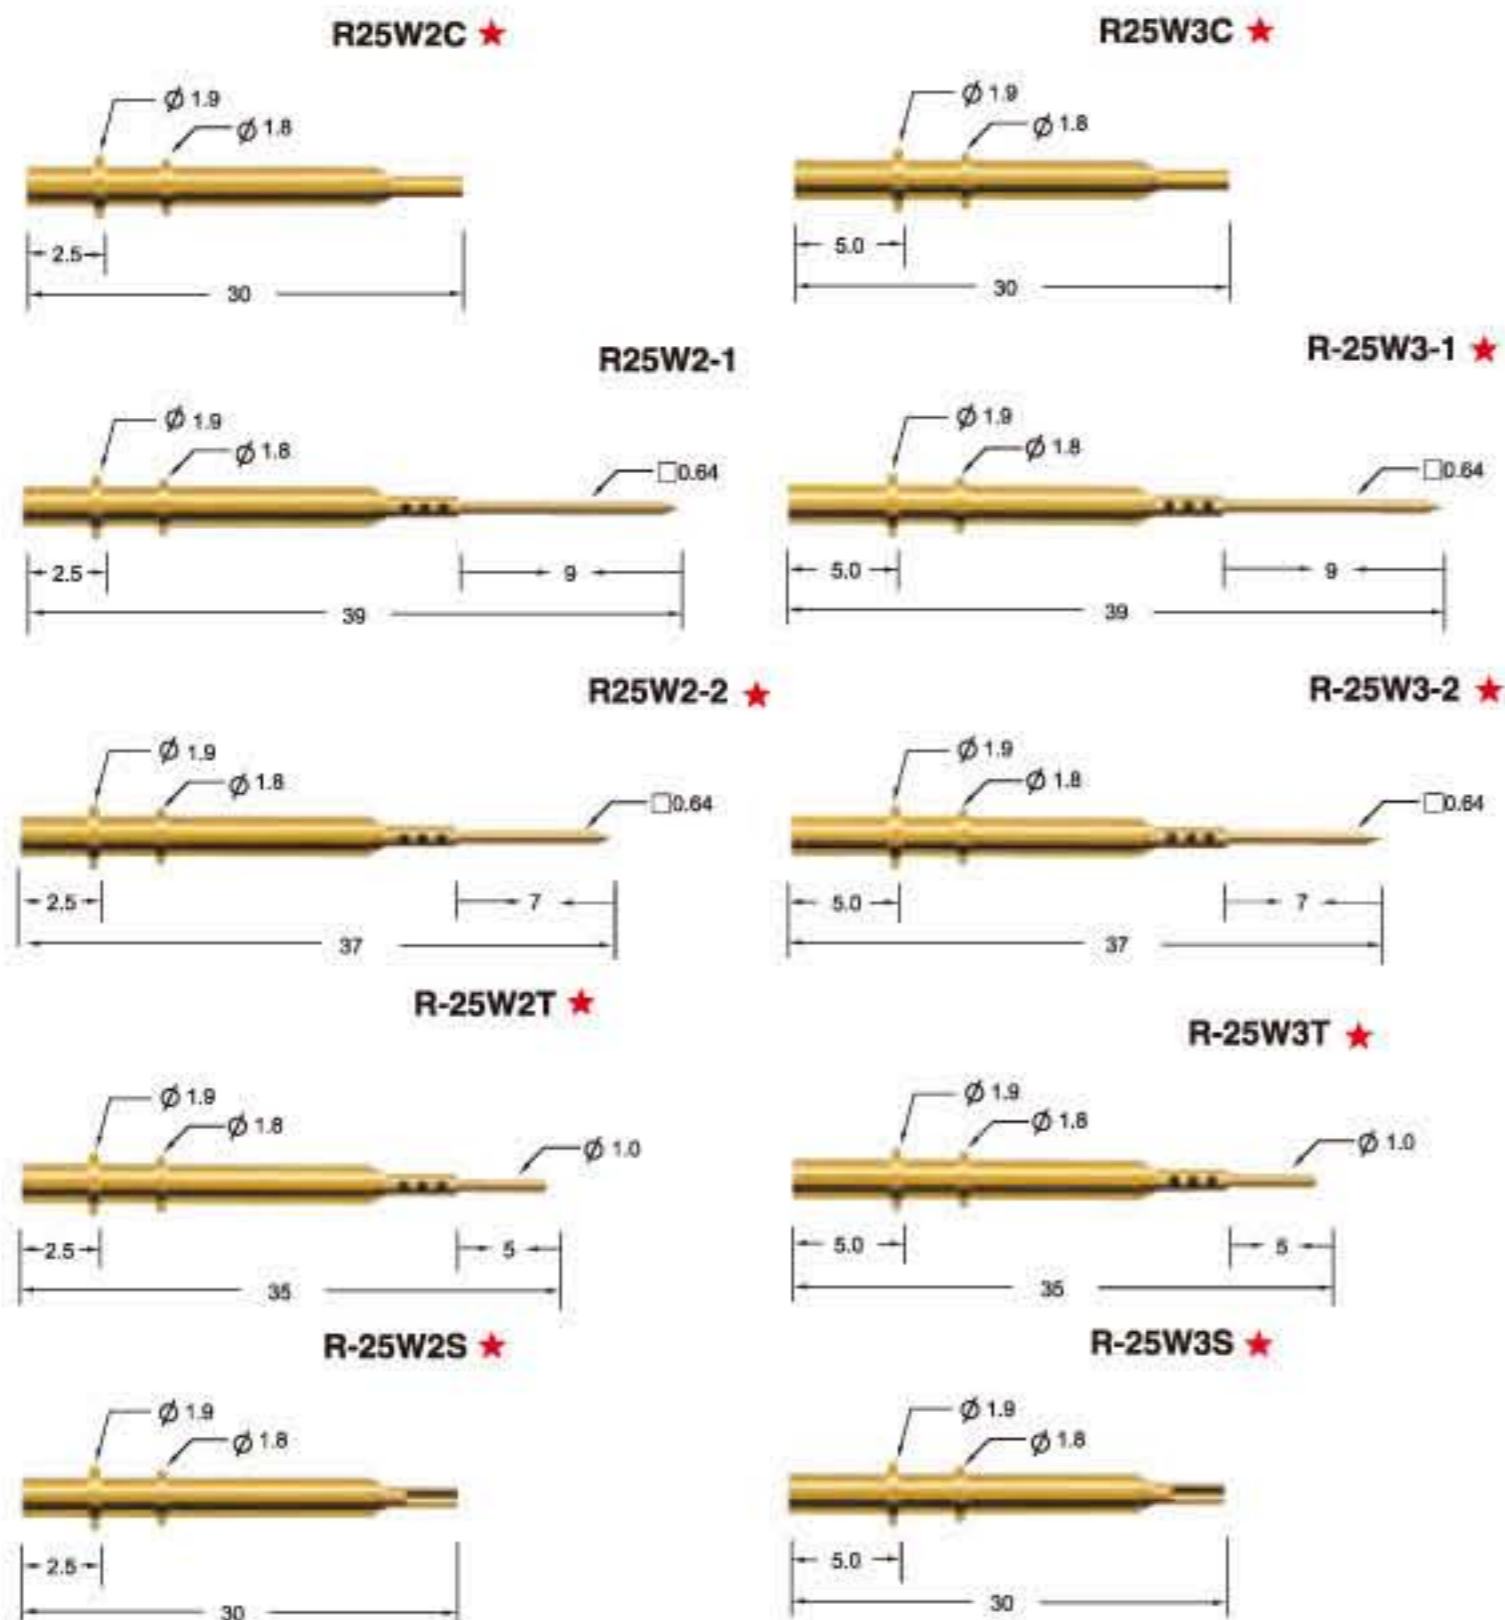

## Probe specifications R-25

- Recommended min. center (最小間距) : 2.54 (0.1")
- Mounting hole size (鑽孔尺寸) : 1.7 (.0669") / 1.75 (.0689")
- Materials and finishes (材料及塗飾) : Brass, Gold plated
- Connections (接線形式) :  
 Crimp: R-25W2C, R-25W3C, R-25W4C, R-25W5C  
 Solder cup: R-25W2S, R-25W3S, R-25W4S  
 Wire wrap: R-25W2-1, R-25W2-2  
                   R-25W3-1, R-25W3-2, R-25W4-1, R-25W4-2  
                   R-25W5-2  
 Twrminal: R-25W2T, R-25W3T, R-25W4T, R-25W5T
- ★ 為訂製品代號

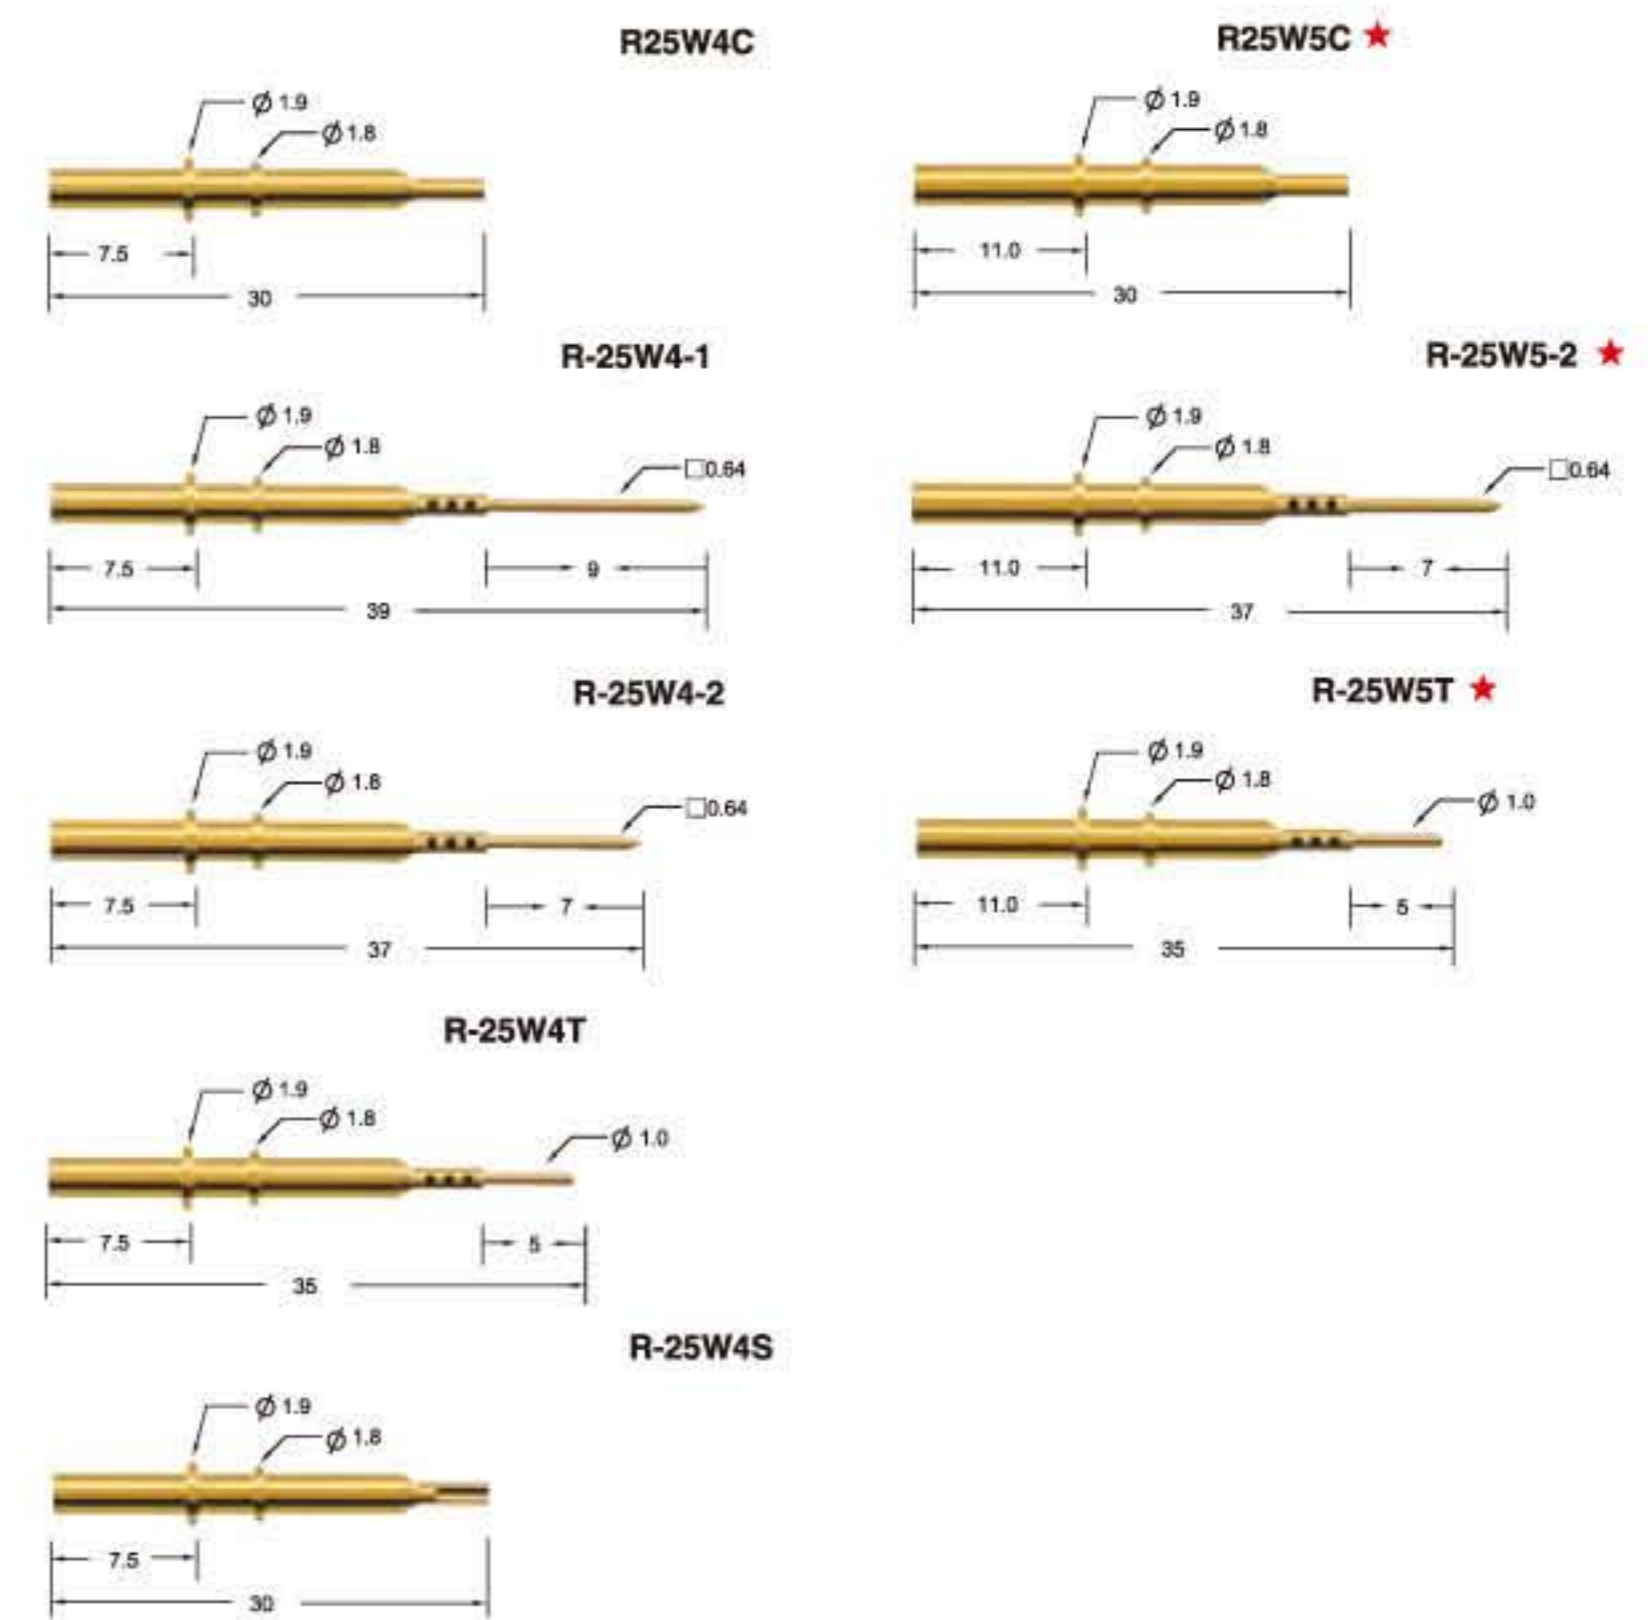


## Probe specifications R-25

- Recommended min. center (最小間距) : 2.54 (0.1")
- Mounting hole size (鑽孔尺寸) : 1.7 (.0669") / 1.75 (.0689")
- Materials and finishes (材料及塗飾) : Brass, Gold plated
- Connections (接線形式) :  
 Crimp: R-25W2C, R-25W3C, R-25W4C, R-25W5C  
 Solder cup: R-25W2S, R-25W3S, R-25W4S  
 Wire wrap: R-25W2-1, R-25W2-2  
                   R-25W3-1, R-25W3-2, R-25W4-1, R-25W4-2  
                   R-25W5-2  
 Twrminal: R-25W2T, R-25W3T, R-25W4T, R-25W5T
- ★ 為訂製品代號



# CPM-050 R-050

Unit:mm

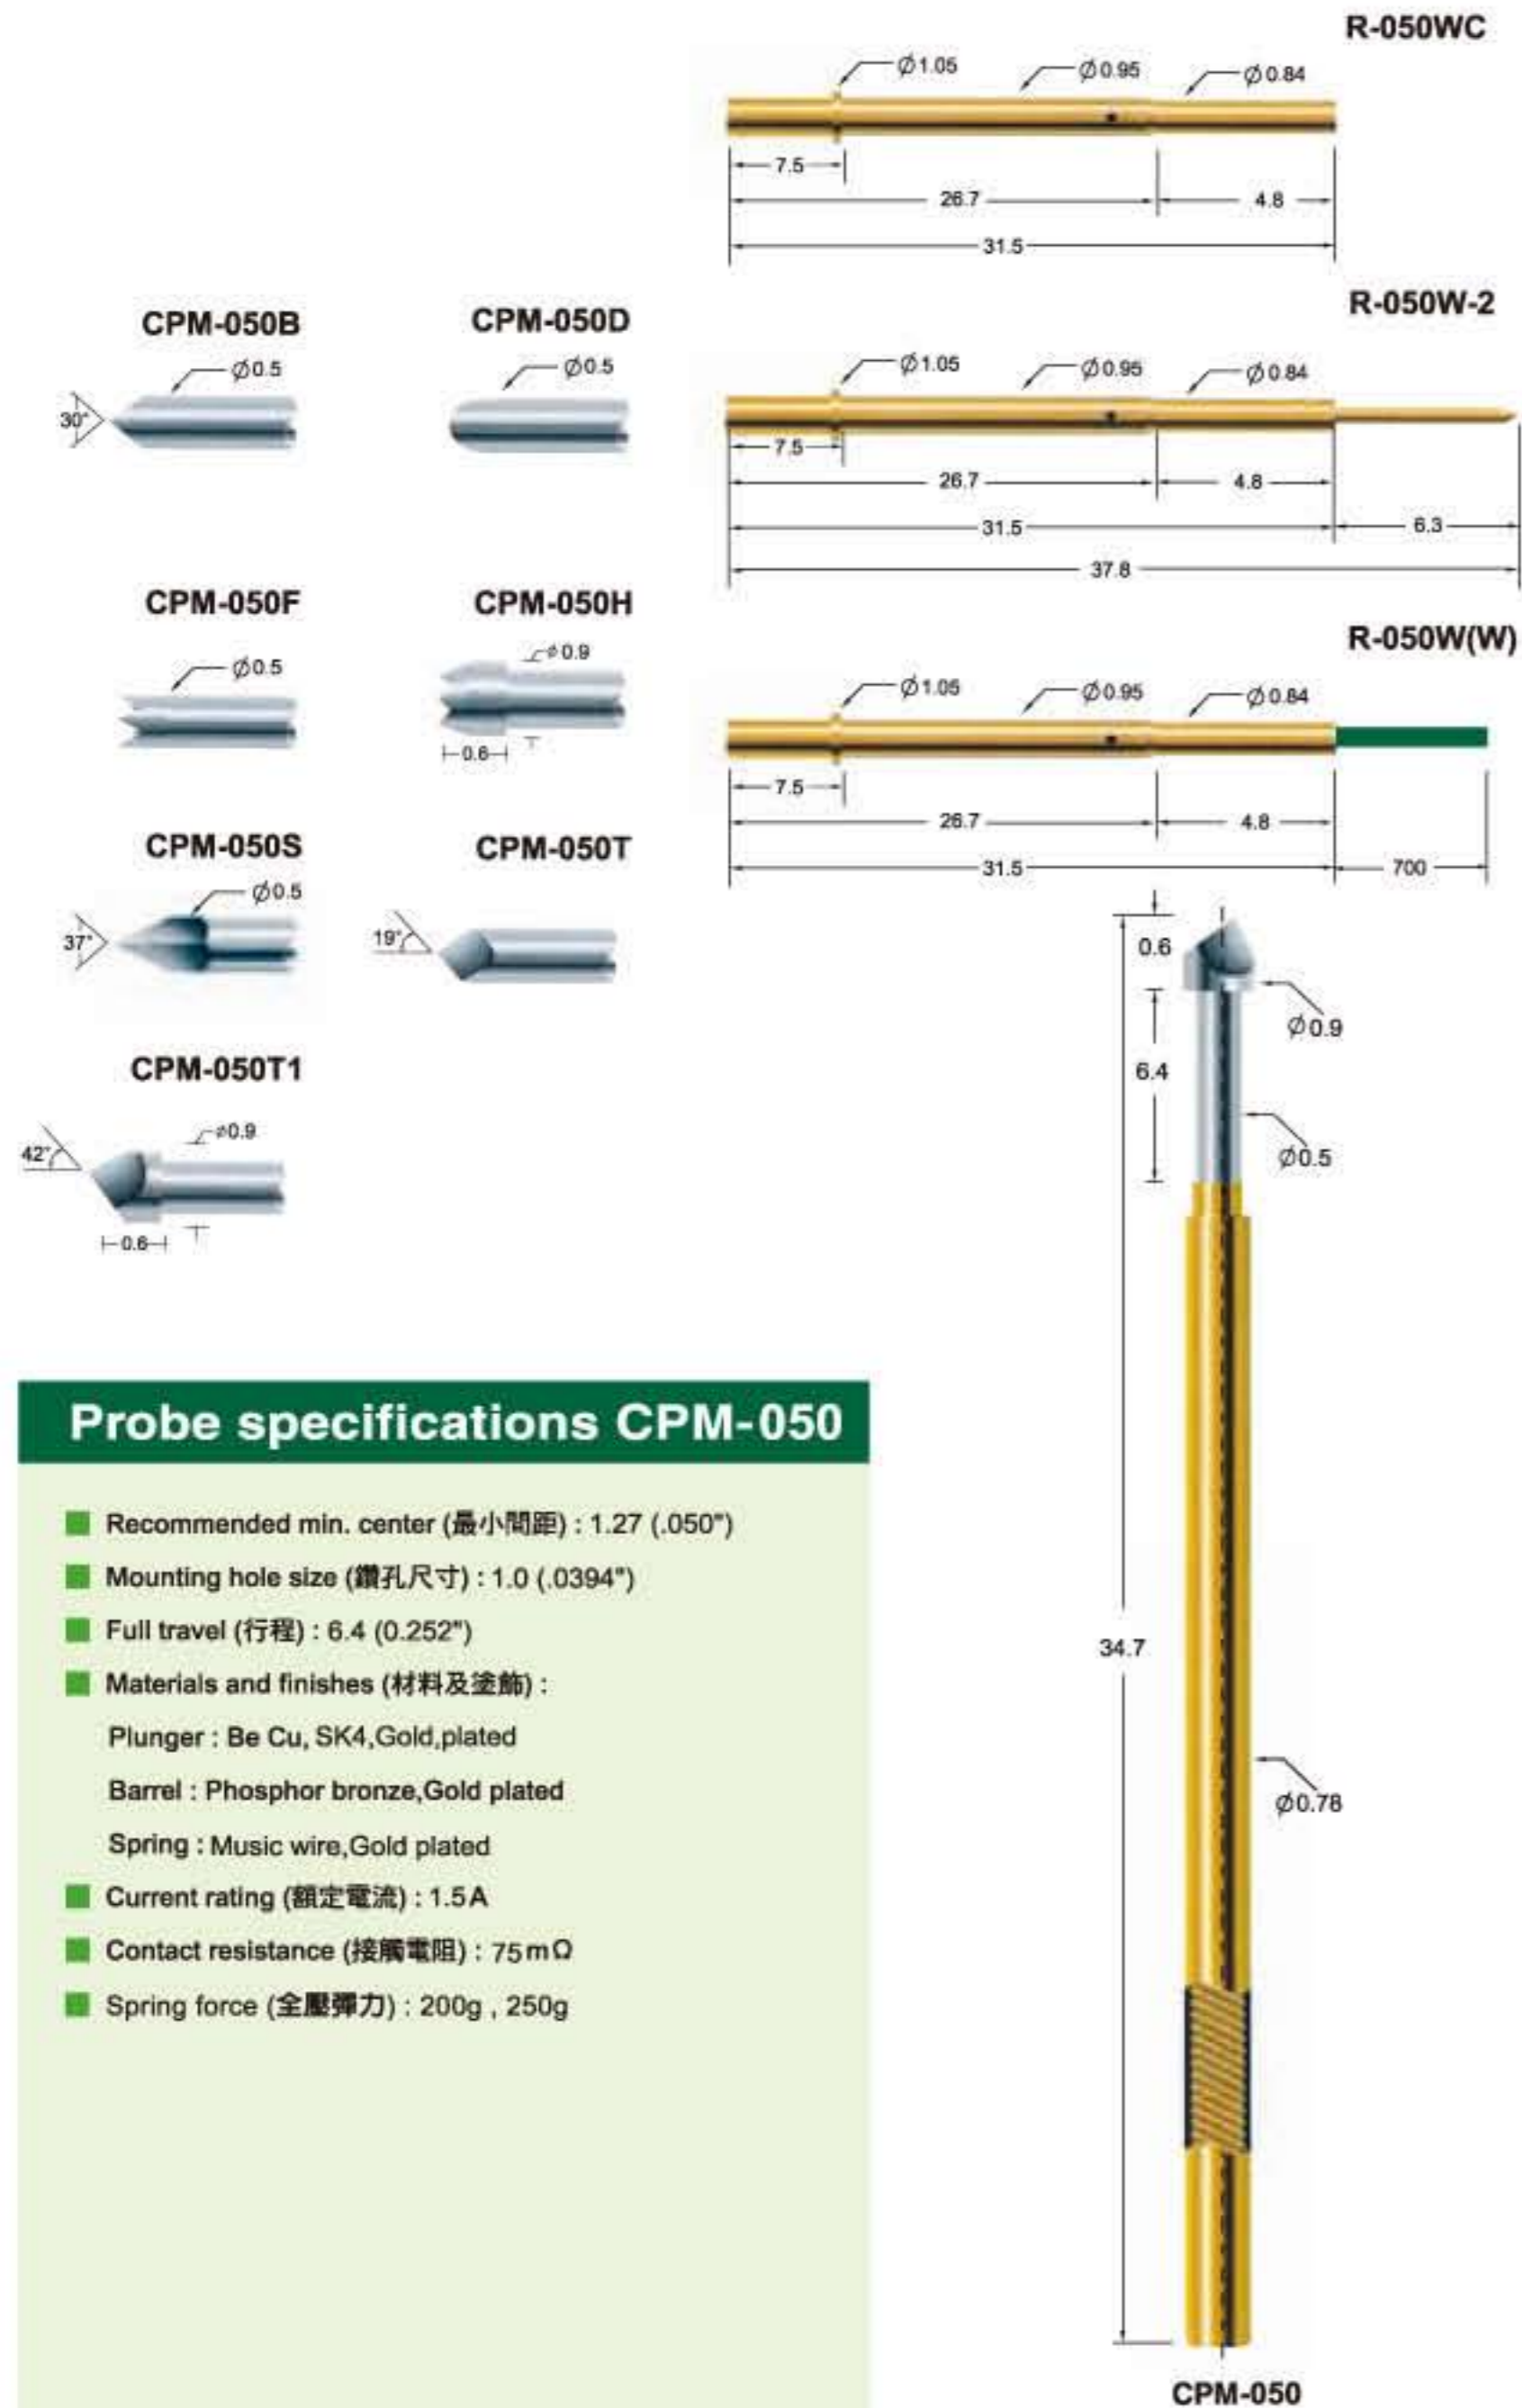


## Probe specifications CPM-050

- Recommended min. center (最小間距) : 1.27 (.050")
- Mounting hole size (鑽孔尺寸) : 1.0 (.0394")
- Full travel (行程) : 6.4 (0.252")
- Materials and finishes (材料及塗飾) :  
 Plunger : Be Cu, SK4, Gold, plated  
 Barrel : Phosphor bronze, Gold plated  
 Spring : Music wire, Gold plated
- Current rating (額定電流) : 1.5A
- Contact resistance (接觸電阻) : 75 m $\Omega$
- Spring force (全壓彈力) : 200g , 250g

# CPM-050L R-050L

Unit:mm

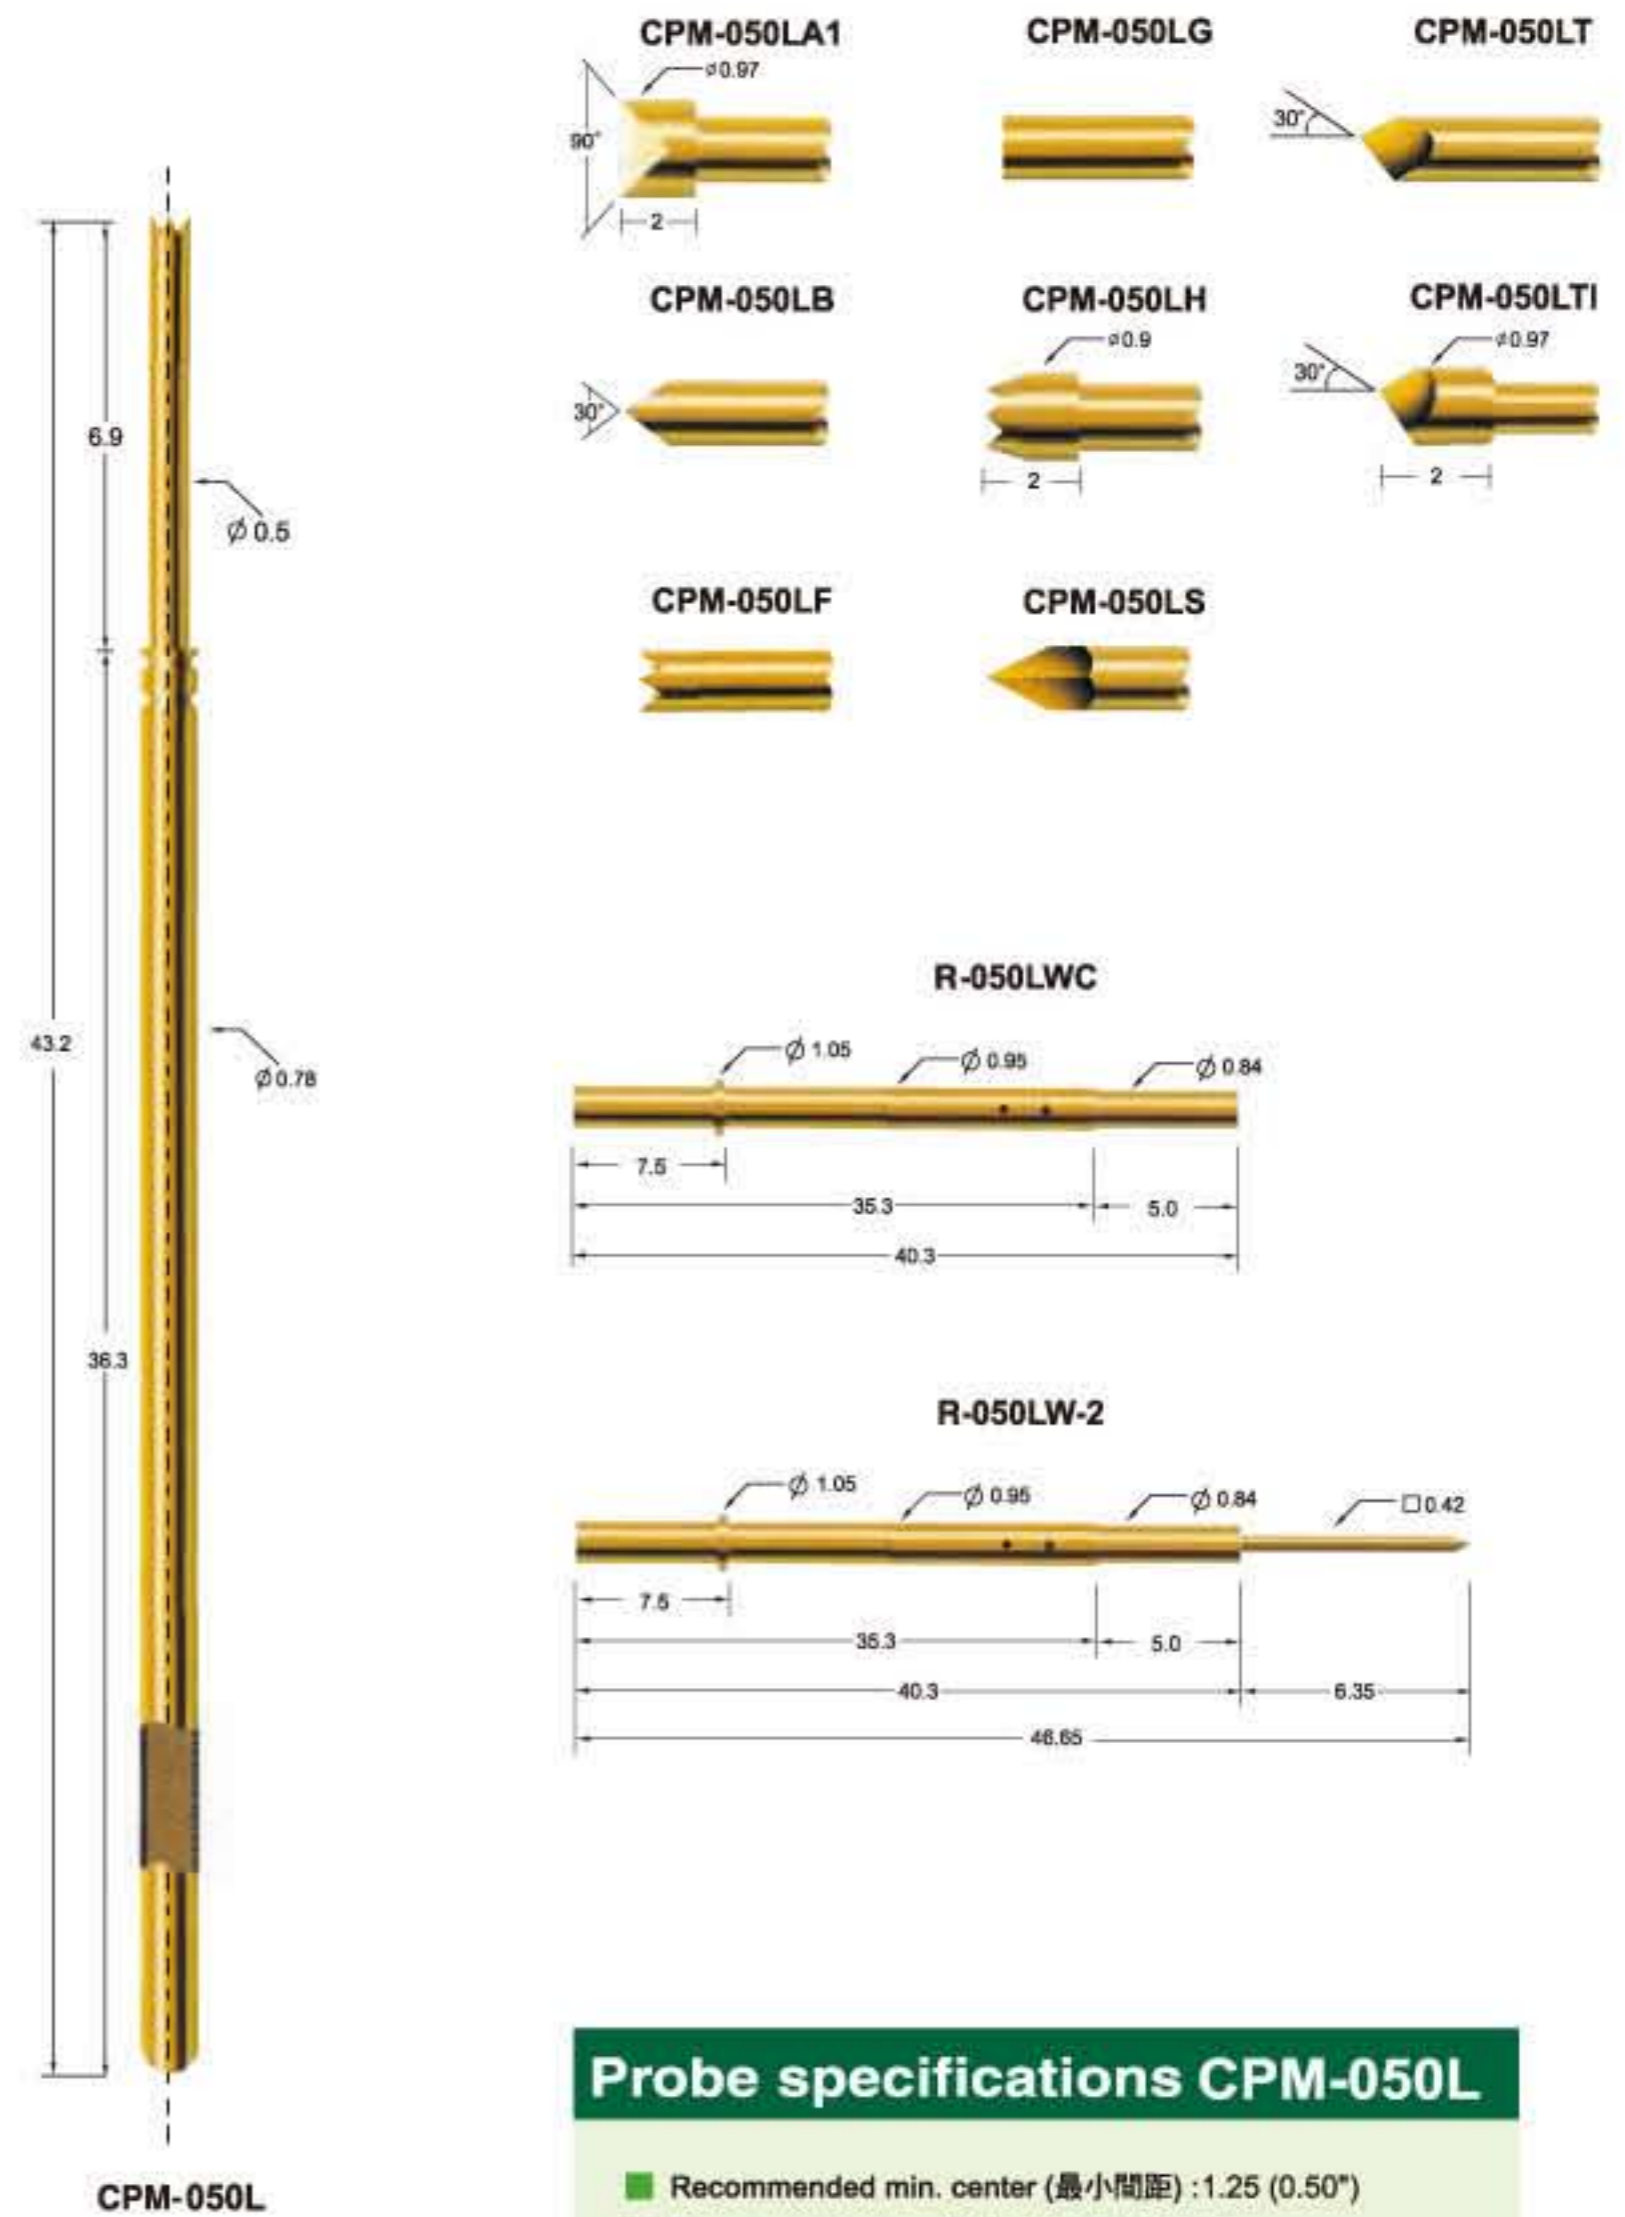

## Probe specifications CPM-050L

- Recommended min. center (最小間距) : 1.25 (0.50")
- Mounting hole size (鑽孔尺寸) : 1.0 (.039")
- Materials and finishes (材料及塗飾) : Be Cu, SK4, Gold plated
- Spring: Music wire, SK4
- Connections (接線形式) :  
 Crimp: R-050LWC  
 Wire wrap: R-050LW-2, R-050LW(W)
- Spring force (全壓彈力) : 300g , 150g